


Material:

Contact: Copper Alloy With Gold Plated.

Lock Link: Copper Alloy With Nickel Plated.

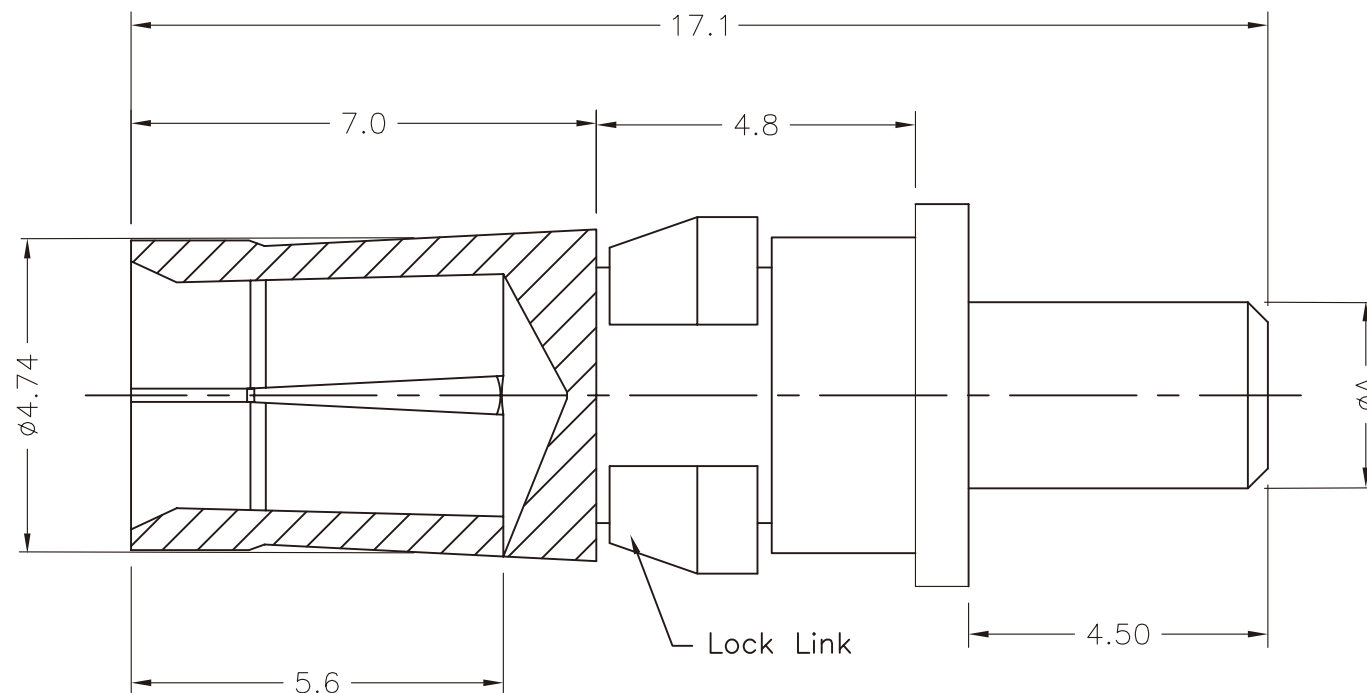

Current Rating (AMP)	Dimension
	ϕA
40	3.75
30	3.17
20	2.85
10	1.70

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE

SCALE 1 : 1

SIZE A4

TOLERANCES ARE

X. \pm

.X \pm

.XX \pm

.XXX \pm

ANG \pm

PPOJECTION

**ORDER INFORMATION**

UM-FD-xx-LF
SERIES | T | LEADFREE
FEMALE | 40:40AMP
30:30AMP
20:20AMP
10:10AMP
180°

DESCRIPTION: Power Pin Female Staight Type