
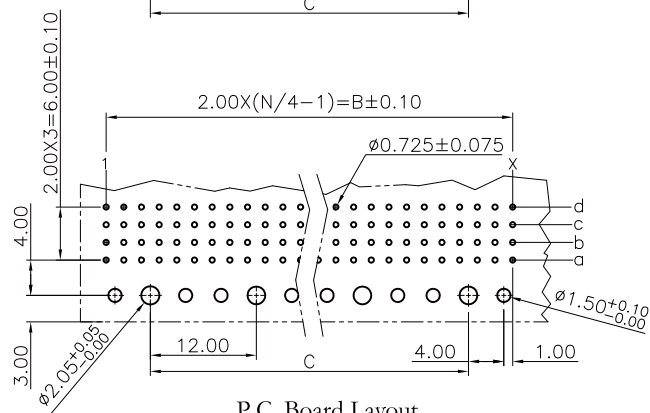
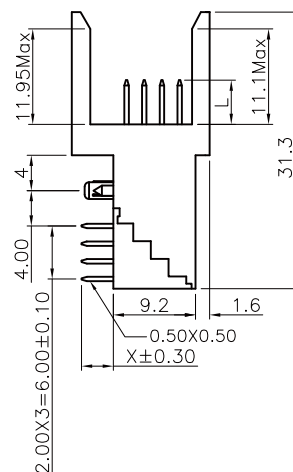
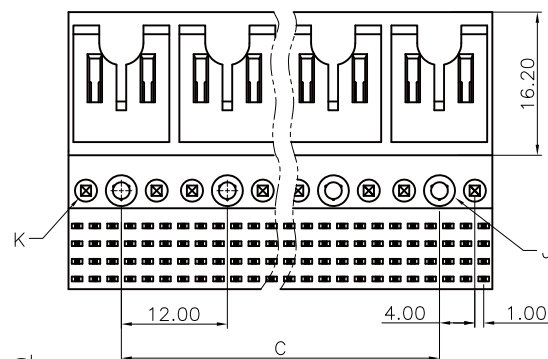
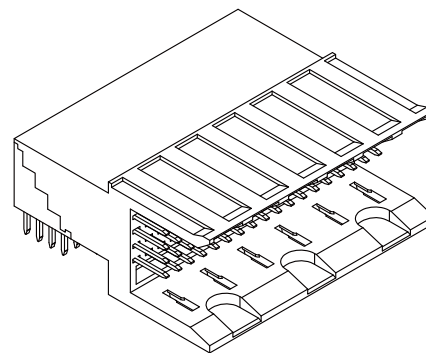


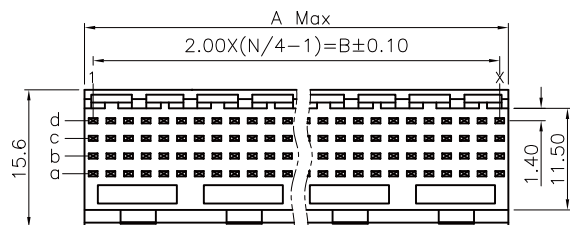

P.C. Board Layout
(Tolerance:±0.05)

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Brass.

Electrical Characteristics:

Current Rating: 1 AMP.



Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.


Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -65°C ~+125°C .

***RoHS Compliant**



Detail: J

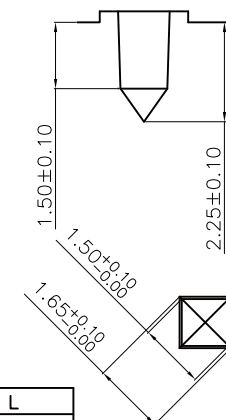

Detail: K

TYPE NO.	L		
50	5.00		
57	5.75		
65	6.50		
72	7.25		
80	8.00		
DIP LENGHT(X)	02	2.90	
	03	3.53	
Part NO.	A	B	C
FUB-PRxxyy-4X06	11.95	10.0	0.0
FUB-PRxxyy-4X12	23.95	22.0	12.0
FUB-PRxxyy-4X18	35.95	34.0	24.0
FUB-PRxxyy-4X24	47.95	46.0	36.0
FUB-PRxxyy-4X30	59.95	58.0	48.0
FUB-PRxxyy-4X36	71.95	70.0	60.0
FUB-PRxxyy-4X42	83.95	82.0	72.0
FUB-PRxxyy-4X48	95.95	94.0	84.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FUB-PRxxyy-4Xxx-LF

SERIES MALE DIP 90° X
50:5.00mm
57:5.75mm
65:6.50mm
72:7.25mm
80:8.00mm
LEADFREE
4X06:30WAY
4X48:240WAY

DESCRIPTION: