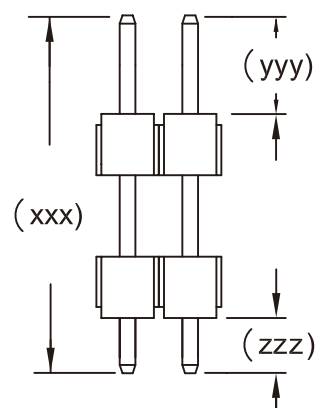
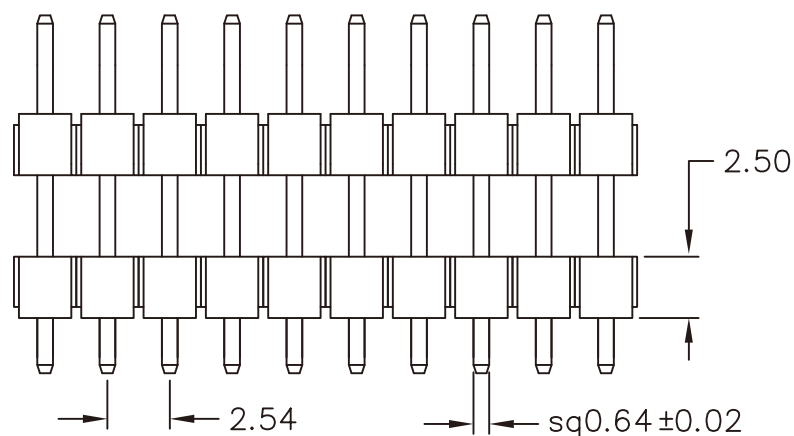
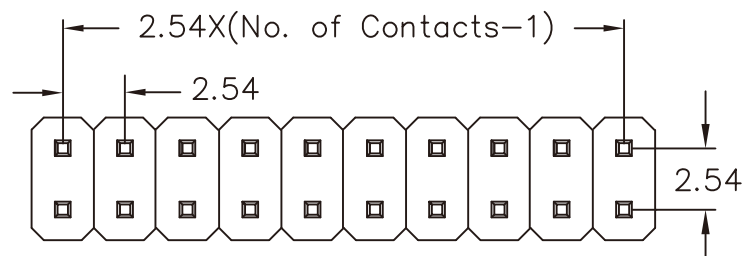


Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass, Gold Flash

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

HSB-Dxxxxxyyzzz-2Xxx-LF

SERIES DIP180° TOTAL 168:16.8mm CONTACT 072:7.2mm 2X02:04WAY 2X50:100WAY LEADFREE 030:3.0mm

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT STACK