

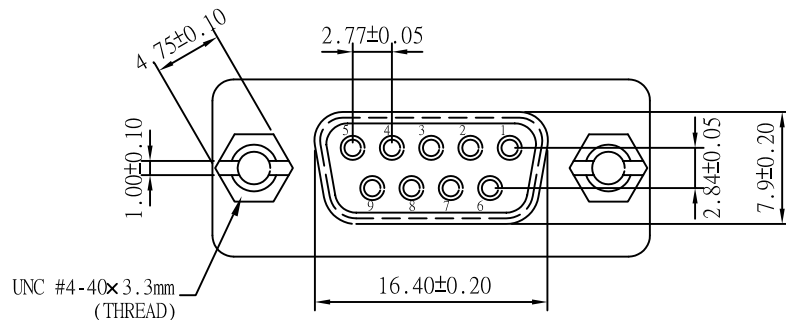
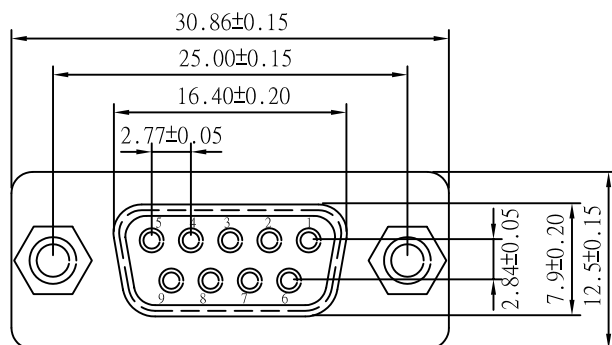


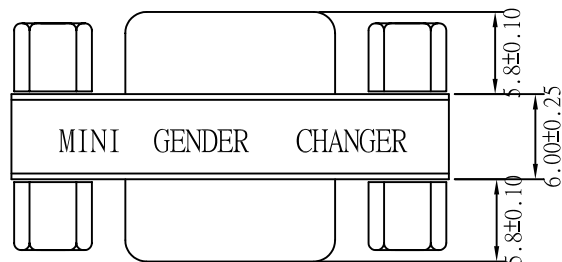

UNC #4-40 Hexscrew UNC #4-40 Hexnut

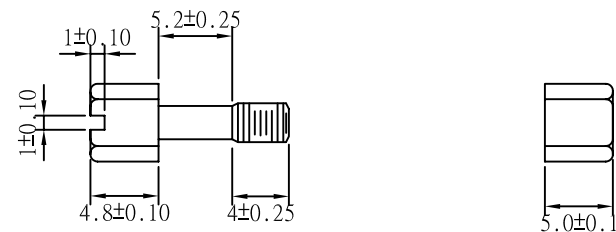

DB 09 F/F GENDER CHANGER

PIN OUT: 9Female

9Female

1	-----	1
2	-----	2
8	-----	8
9	-----	9
G	-----	G

Label: yellow color with black charactor

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell (Nickel Silver)

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DBX2-FS-0909-LF

SERIES | LEADFREE
09 TO 09 WAY
FEMALE TO FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: