


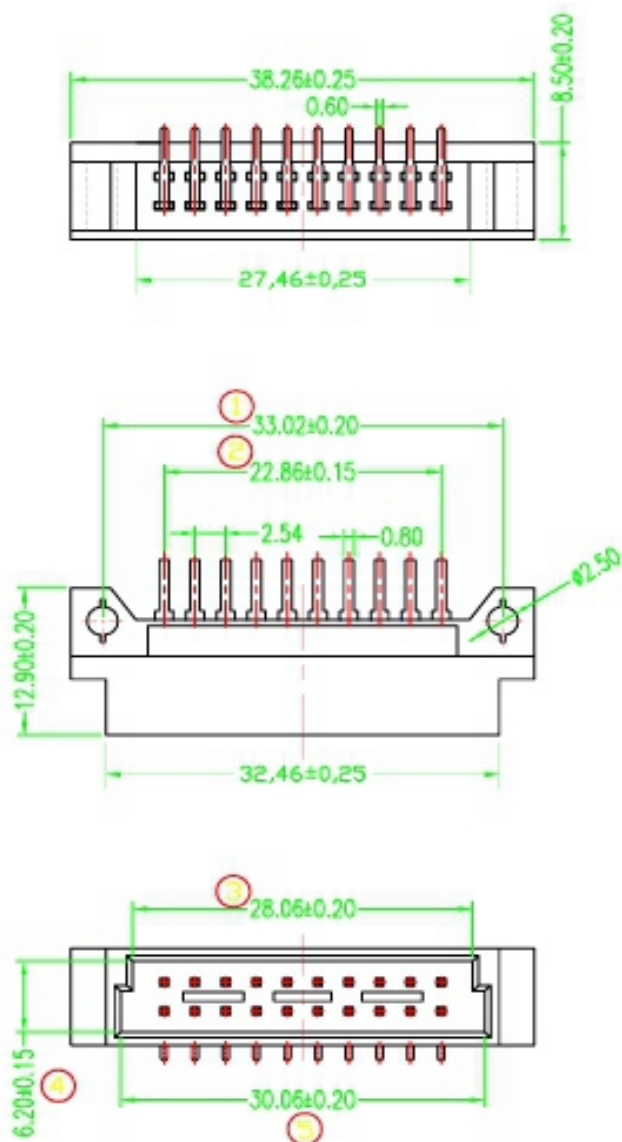


1. Material

Insulator body :Glass Filled PBT and PC 10% UL94V-0
 Contact material :Brass
 Contact plating :Gold

2. Electrical

Current rating :2Amp
 Dielectric withstanding :AC 1000V for 1 minute
 Insulation resistance :1000 Megohms min at DC 500V
 Contact resistance :10 Milliohms max
 Operating temperature :-55° C to +105° C

3. "X" main key dimensions, must be checked.



MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$


.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

UB-PR-2X10-LF
 SERIES | 20WAY | LEADFREE
 DIP 90°
 MALE

DESCRIPTION: