

MATERIAL





Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000M Ω Min. at DC 500VContact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

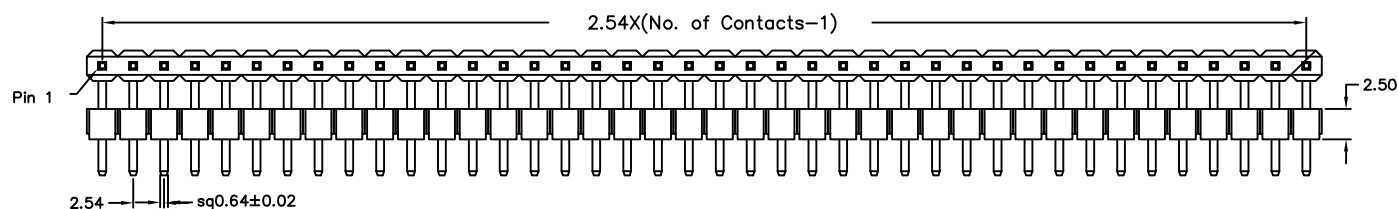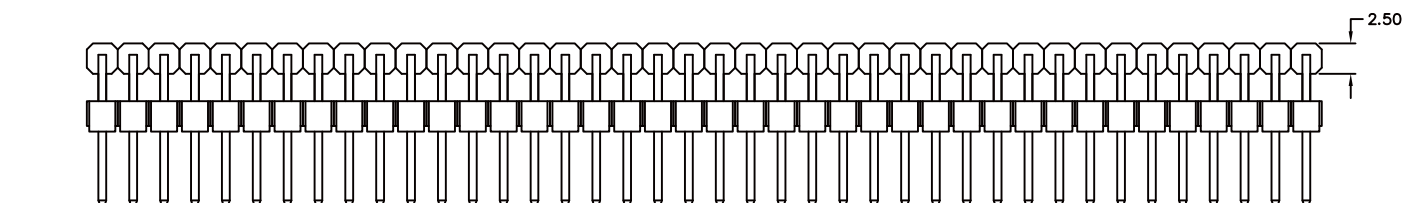

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

**ORDER INFORMATION****HSB-R60603060-1Xxx-LF**

SERIES	90°SMT	BASE 6.0mm	DIP 3.0mm	CONTACT 6.0mm	LEADFREE
					1X02:02 WAY
					1X40:40 WAY
					HIGH 6.0mm

DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, DUAL ROWS