

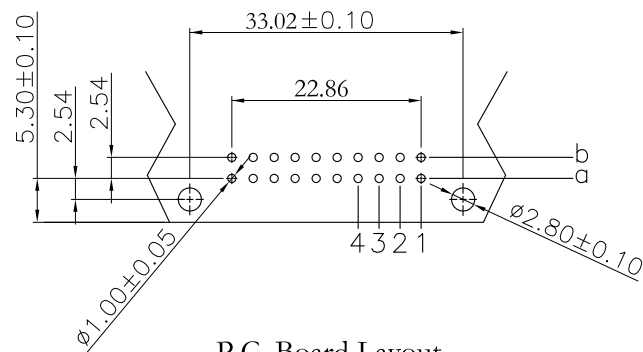
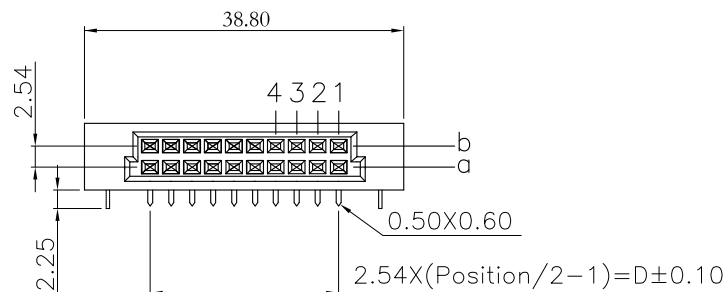


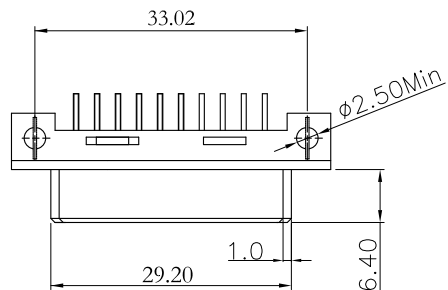

P.C. Board Layout

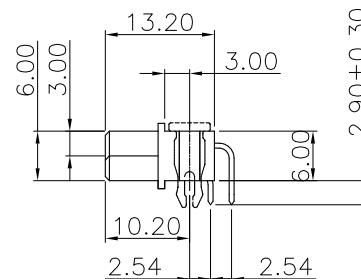

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze

Lock: Phosphor Bronze

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 30m Ω max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C .

Nickel thickness: 50~120u"

***RoHS Compliant**

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$


.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

UB-SRZS30-2X10-LF
SERIES | | | LEADFREE
20WAY
S30:SEMI/GOLD /30u"
BOARD LOCK
DIP 90°
FEMALE

DESCRIPTION: