

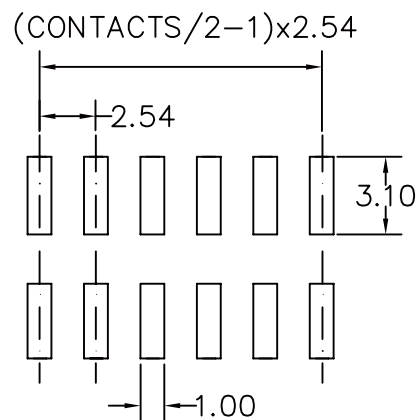
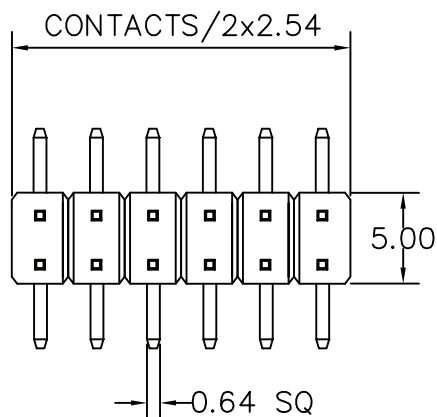




RECOMMENDED P.C.B LAYOUT

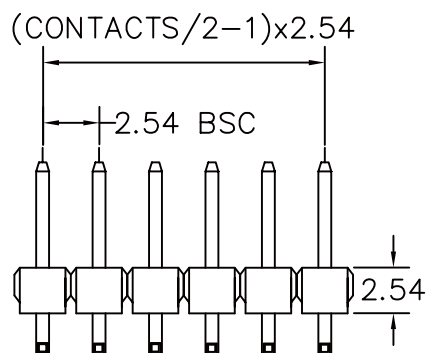

A: 7.50 mm B: 6.00 mm C: 3.30 mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 1000V RMS

CONTACTS	
2X21	
2X22	
2X23	
2X24	
2X25	
2X26	
2X27	
2X28	
2X29	
2X30	
2X31	
2X32	
2X33	
2X34	
2X35	
2X36	
2X37	
2X38	
2X39	
2X40	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

H-V33X-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X40:80WAY
NON POST
HIGH 3.3mm
180°SMT

DESCRIPTION: