
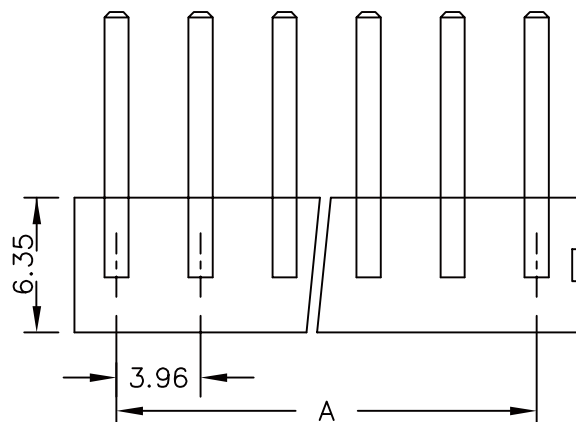
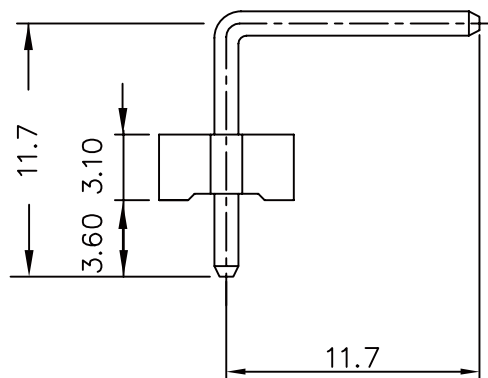


PCB LAYOUT COMPONENT SIDE

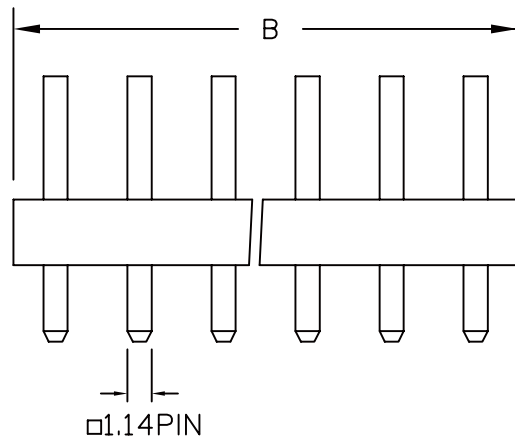

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Insulation Resistance: $1000\text{M}\Omega / \text{min.}$

Dielectric Withstanding Voltage: $1500\text{V AC} / \text{min.}$

Contact Resistance: $10\text{m}\Omega / \text{max.}$

Material

Material: Nylon66, UL94V-2

Poles	Dimension mm (in.)		Part No.
	A	B	
2	3.96	8.00	KX-R-02
3	7.92	12.00	KX-R-03
4	11.88	15.90	KX-R-04
5	15.84	20.00	KX-R-05
6	19.80	24.00	KX-R-06
7	23.76	27.90	KX-R-07
8	27.72	31.90	KX-R-08
9	31.86	35.80	KX-R-09
10	35.64	39.90	KX-R-10
11	39.60	43.90	KX-R-11
12	43.56	47.80	KX-R-12
13	47.52	51.80	KX-R-13
14	51.48	55.70	KX-R-14
15	55.44	59.80	KX-R-15
16	59.40	63.80	KX-R-16
17	63.36	67.70	KX-R-17
18	67.32	71.70	KX-R-18
19	71.28	75.60	KX-R-19
20	75.24	79.80	KX-R-20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

P PROJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

KX-R-xx-LF
SERIES | LEADFREE
02~20WAY
DIP 90°

DESCRIPTION: 3.96mm Wire-to-Board Header