

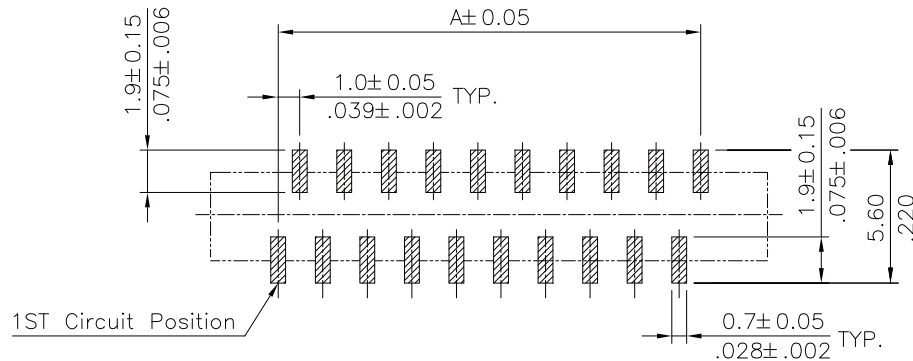
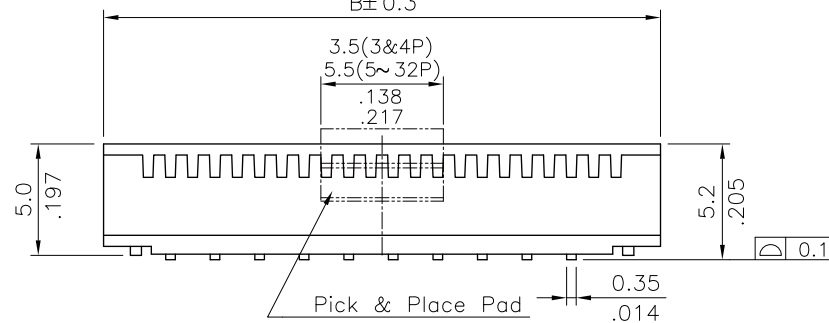
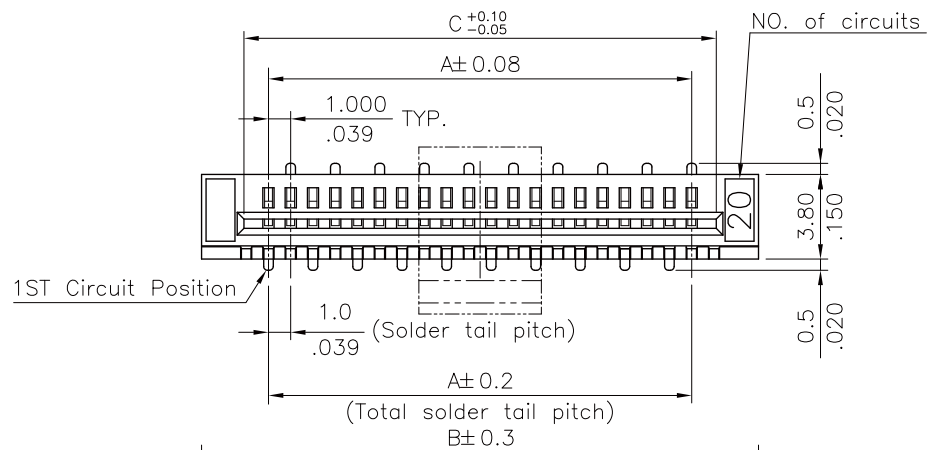


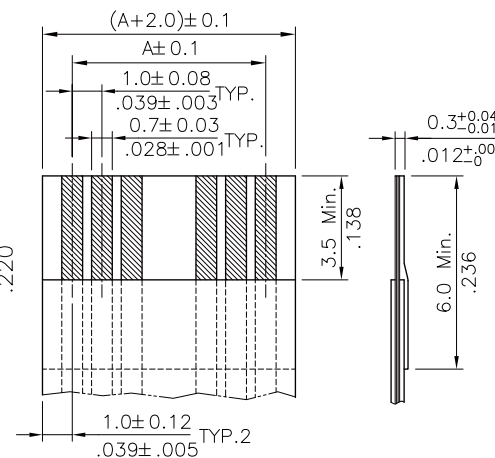

Sold Pad Pattern

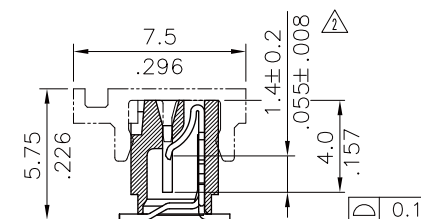

* ACCOMMODATED FFC

Notes:


- * Insulation: Nylon 6T UL 94V-0 (Halogen-Free)
- * Contact: Phosphor Bronze
- * PAD: Nylon 6T UL 94V-0, Color Black(Halogen-Free)
- * For Lead-Free IR Reflow process

$$A = 1.00 \times \text{No. of Spaces}$$

$$B = A + 6.0$$

$$C = A + 2.1$$

- * Available in 3 through 32 circuits

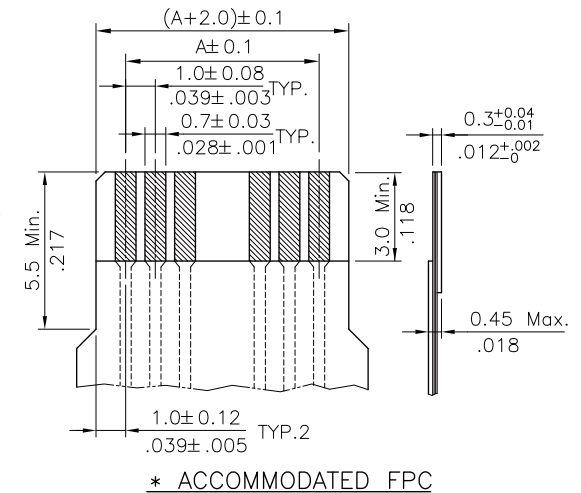

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ±



ORDER INFORMATION

FPA-VLAL52C-xx-LF

SERIES
180°SMT
NON ZIF
CAP
HIGH 5.2mm
L TYPE
SINGLE CONTACT
LEAD FREE
03~32WAY

DESCRIPTION: