
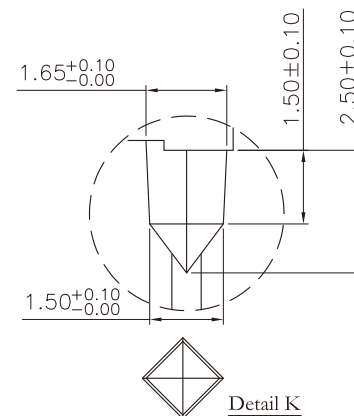
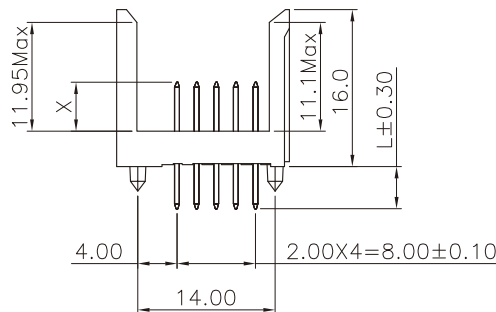
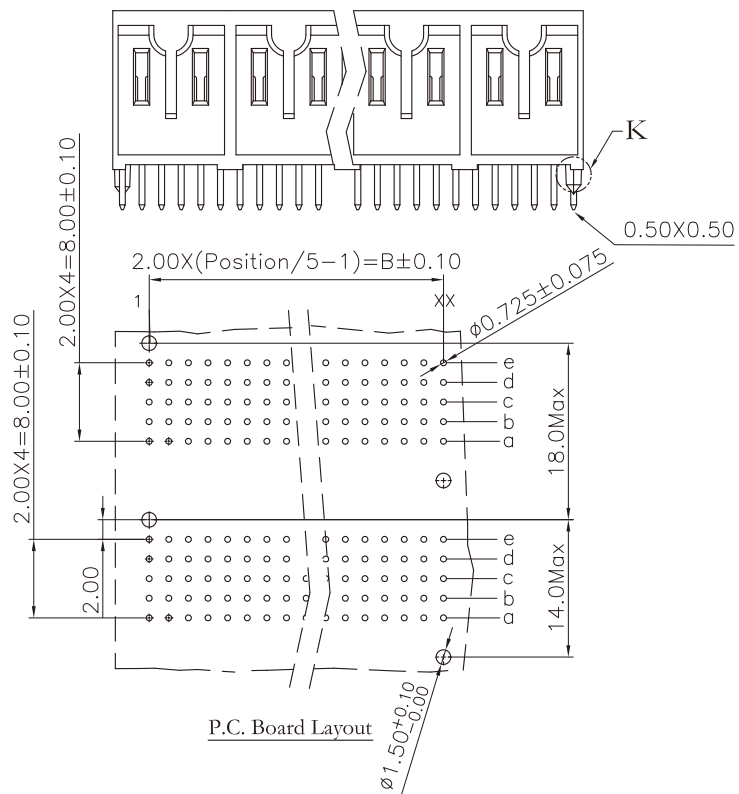
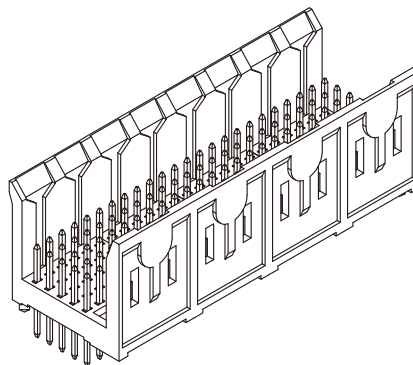


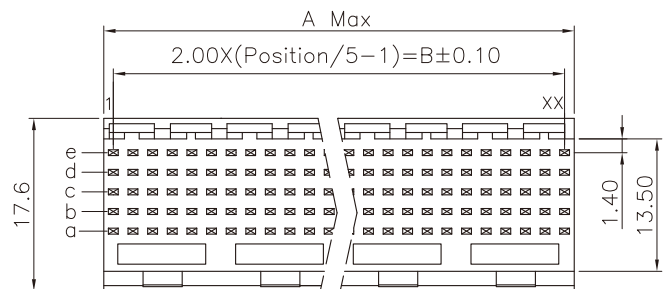

Material:

Housing: High Temperature Plastic UL94V-0

Contacts: Brass.

Electrical Characteristics:

Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -65°C ~ +125°C .

*RoHS Compliant

		P/N.		L	X
Position (n)	Dimension	A	B		
30	11.95	10.0	FUB-PD0450-5Xxx	4.3	5.00
60	23.95	22.0	FUB-PD0457-5Xxx		5.75
90	35.95	34.0	FUB-PD0465-5Xxx		6.50
120	47.95	46.0	FUB-PD0472-5Xxx		7.25
150	59.95	58.0	FUB-PD0480-5Xxx	13.6	8.00
180	71.95	70.0	FUB-PD1350-5Xxx		5.00
210	83.95	82.0	FUB-PD1357-5Xxx		5.75
240	95.95	94.0	FUB-PD1365-5Xxx		6.50
270	107.95	106.0	FUB-PD1372-5Xxx	17.0	7.25
300	119.95	118.0	FUB-PD1380-5Xxx		8.00
330	131.95	130.0	FUB-PD1750-5Xxx		5.00
360	143.95	142.0	FUB-PD1757-5Xxx		5.75
390	155.95	154.0	FUB-PD1765-5Xxx		6.50
			FUB-PD1772-5Xxx		7.25
			FUB-PD1780-5Xxx		8.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

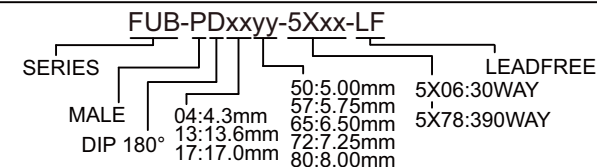

DESCRIPTION: