
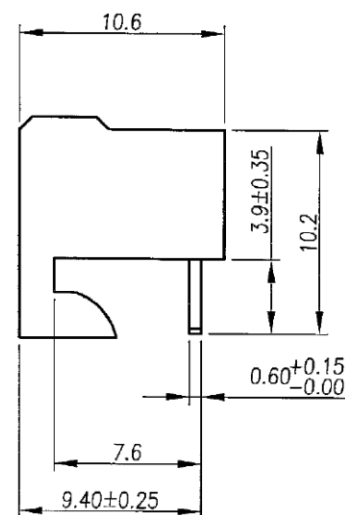
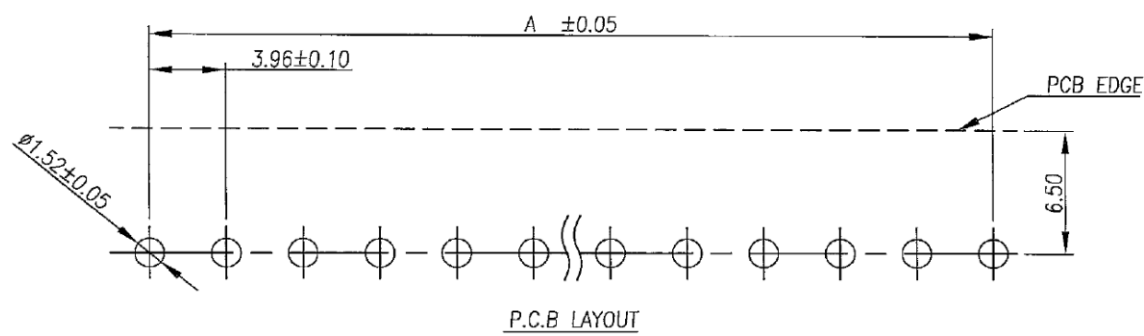
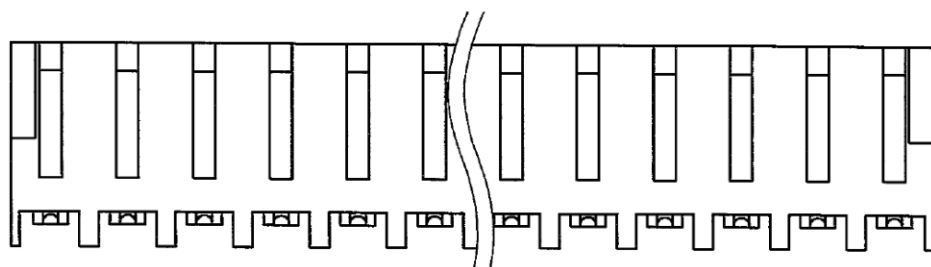


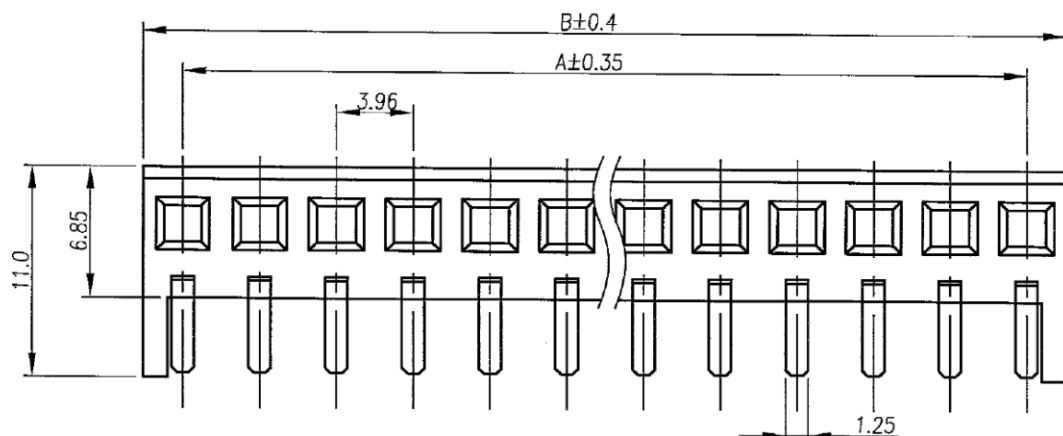

NOTES:

SPECIFICATION

- 1.Current : 5A max.
- 2.Voltage: 250V AC max.
- 3.Insulation Resistance: 1000 Megohms Min.
- 4.Contact Resistance: 10 Milliohms Max.
- 5.Dielectric Withstanding Voltage: 1500V AC
- 6.Non Operating Temperature: 0°C to +75°C

MATERIAL

- 1.Contact: Brass
- 2.Housing: Nylon66, UL 94V-2
- 3.Plated: Tin Plating

NO. OF CONTACT	Dimension		NO. OF CONTACT	Dimension	
	A	B		A	B
02	3.96	8.06	10	35.64	39.74
03	7.92	12.02	11	39.60	43.70
04	11.88	15.98	12	43.56	47.66
05	15.84	19.94	13	47.52	51.62
06	19.80	23.90	14	51.48	55.58
07	23.76	27.86	15	55.44	59.54
08	27.72	31.82	16	59.40	63.50
09	31.68	35.78			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1:1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

KX-S-xx-LF
SERIES | LEADFREE
02~16WAY
SIDE ENTRY

DESCRIPTION: