
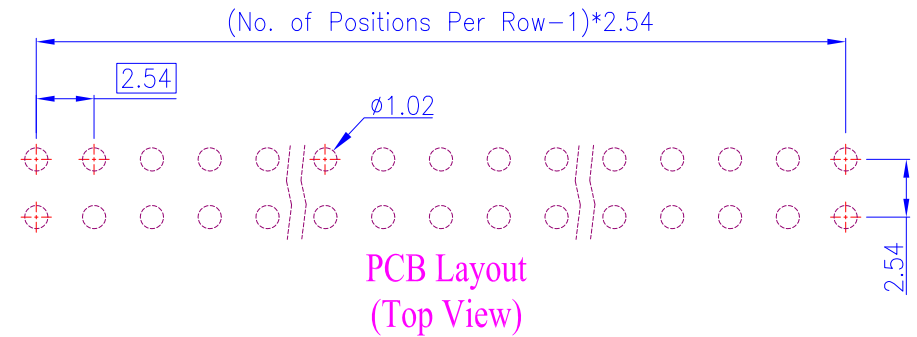
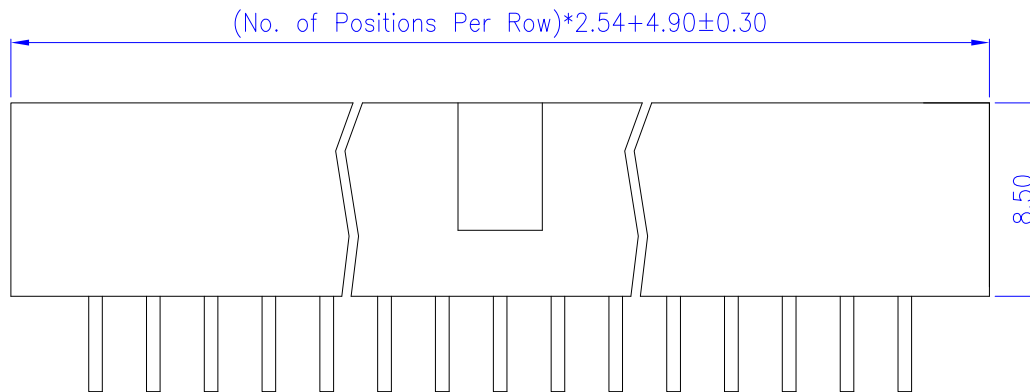


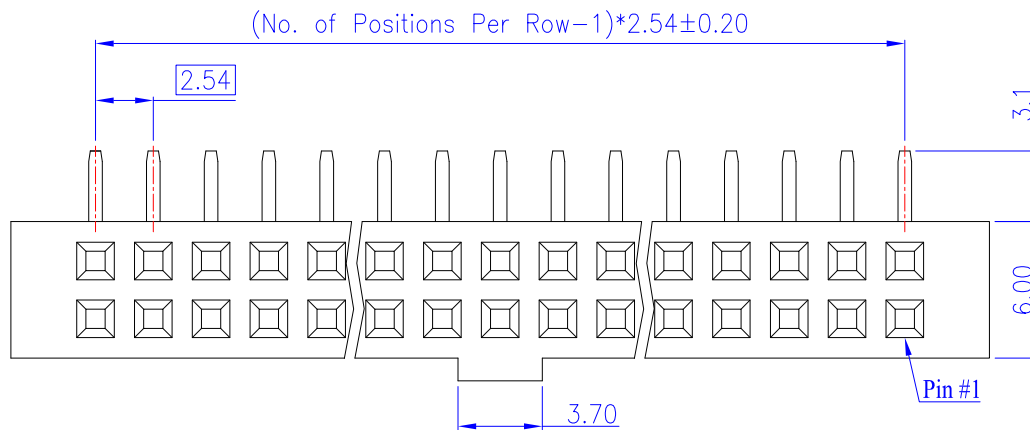

Material and Finish


1. Housing: Thermoplastic (UL94V-0), Black.
2. Terminal: Copper Alloy ($t=0.40\text{mm}$), Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

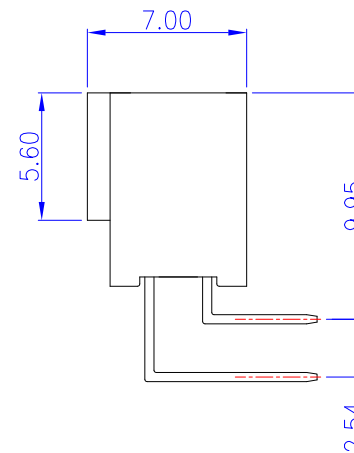

Dimension			Dimension		
Pos.	A	B	Pos.	A	B
08	15.06	7.62	26	37.92	30.48
10	17.60	10.16	28	40.46	33.02
12	20.14	12.70	30	43.00	35.56
14	22.68	15.24	34	48.08	40.64
16	25.22	17.78	36	50.62	43.18
18	27.76	20.32	40	55.70	48.26
20	30.30	22.86	50	68.40	60.96
24	35.38	27.94	68	91.26	83.82

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±



ORDER INFORMATION

FK-RK-2Xxx-LF
SERIES LEADFREE
2X04:08 WAY
2X34:68 WAY
KEY
DIP 90°

DESCRIPTION: 2.54mm Post Header Receptacle
PCB Mount Right Angle Type Dual Rows, With Short Key (W=6.00mm)