
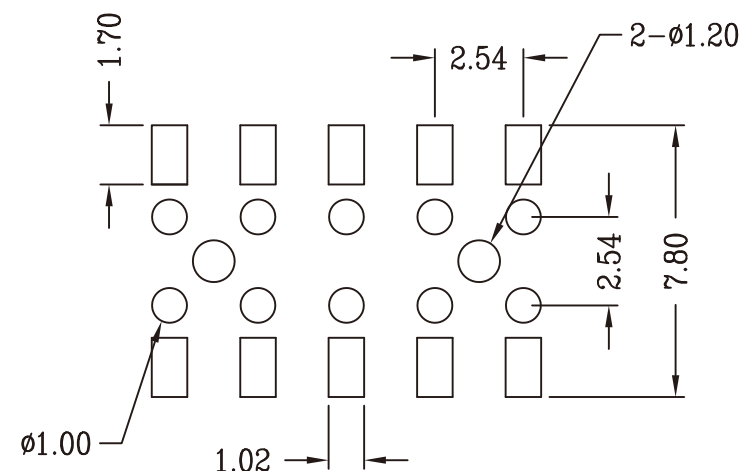
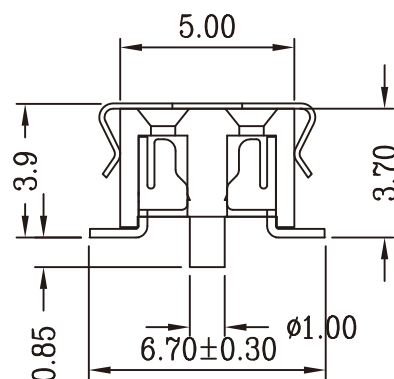
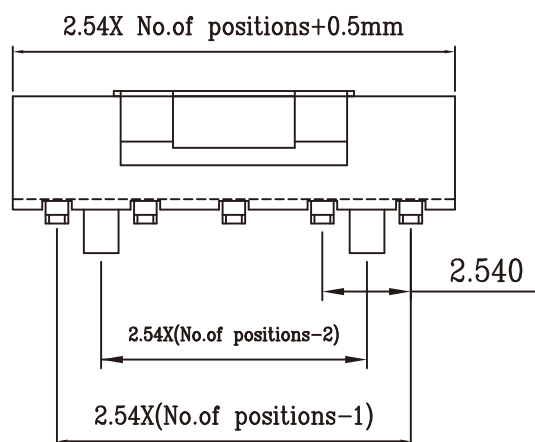


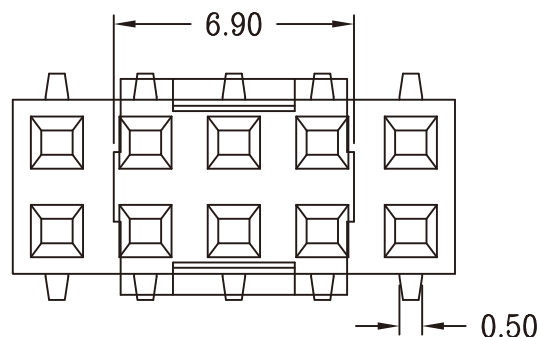

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS
 CURRENT RATING: 3 AMP
 INSULATION RESISTANCE: 1000M OHMS MIN.
 DIELECTRIC WITHSTANDING: 600V AC/DC
 CONTACT RESISTANCE: 20m OHMS MAX.
 OPERATING TEMPERATURE: -40°C ~ +105°C

MATERIALS
 CONTACT MATERIAL: PHOSPHOR BRONZE
 INSULATION MATERIAL: POLYESTER, UL 94V-0
 NYLON 6T

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION



ORDER INFORMATION

F-Z37PC-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 BOTTOM ENTRY SMT CAP POST
 HIGH 3.7mm

DESCRIPTION: 2.54mm Female Socket Dual Row SMD type (H=3.7)