
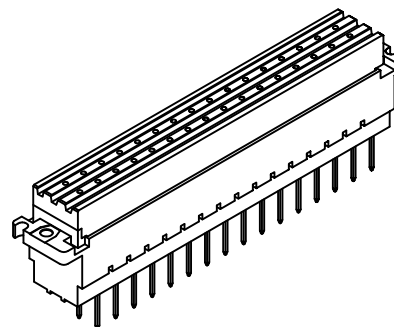


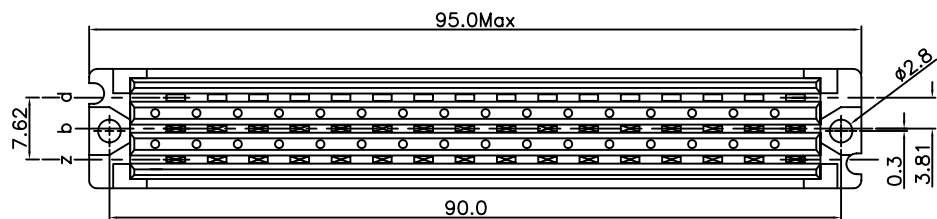

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 5.6 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C .

(A3) *RoHS Compliant

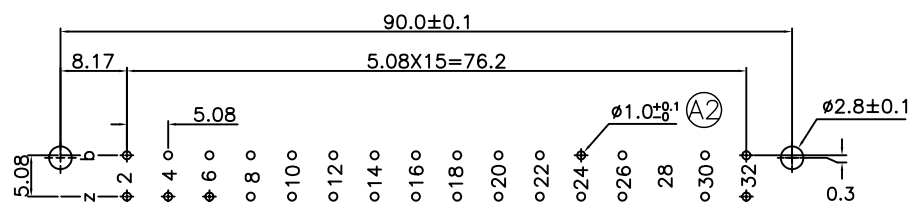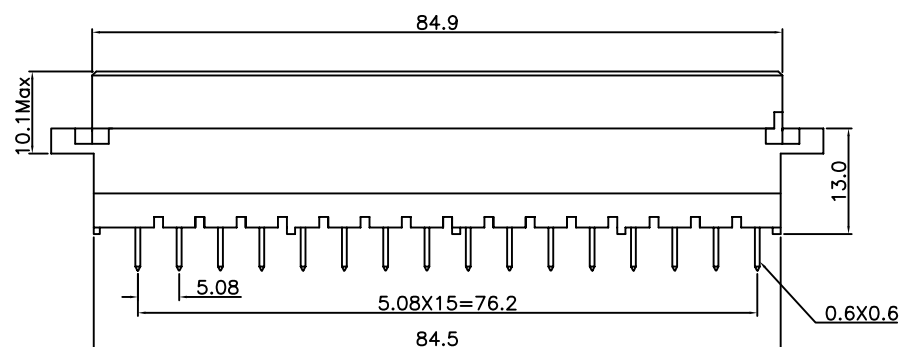

P.C. Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±



ORDER INFORMATION

UF-SDH-2X16BZ-LF
SERIES | 32 WAY | B+Z ROW | LEADFREE
HIGH BODY
DIP 180°
FEMALE

DESCRIPTION: