




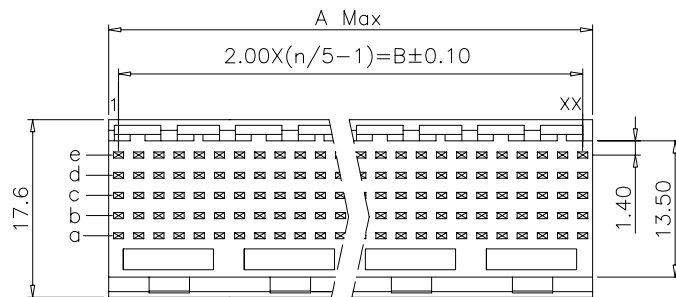


Material:
Housing: High Temperature Plastic UL94V-0
Contacts: Brass.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -65°C~+125°C .

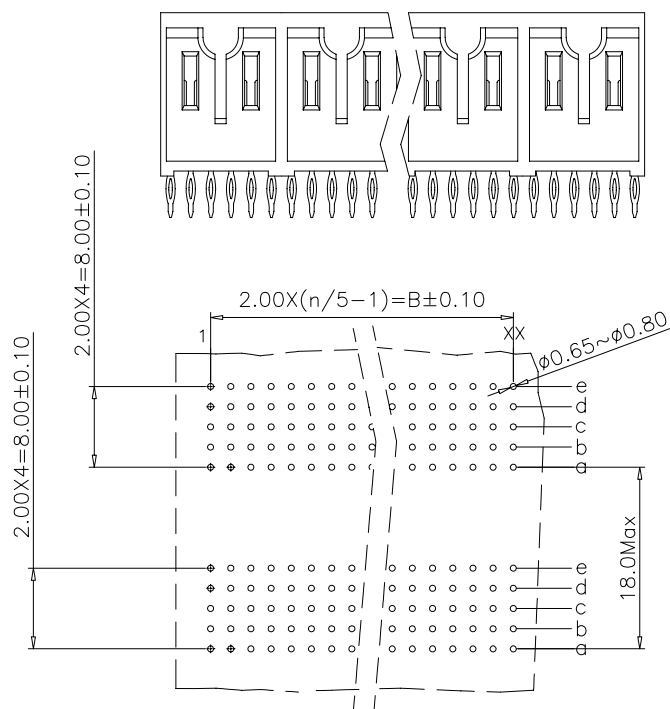

P.C. Board Layout

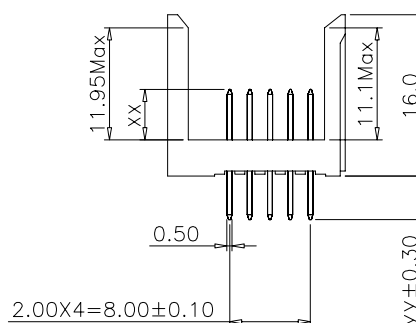

Position (n)	Dimension		P/N.	XX	yy
	A	B			
			FUB-PP0450-5Xxx		5.00
			FUB-PP0457-5Xxx		5.75
30	11.95	10.0	FUB-PP0465-5X06	4.3	6.50
60	23.95	22.0	FUB-PP0472-5X12		7.25
90	35.95	34.0	FUB-PP0480-5X18		8.00
120	47.95	46.0	FUB-PP1350-5X24		5.00
150	59.95	58.0	FUB-PP1357-5X30		5.75
180	71.95	70.0	FUB-PP1365-5X36	13.6	6.50
210	83.95	82.0	FUB-PP1372-5X42		7.25
240	95.95	94.0	FUB-PP1380-5X48		8.00
270	107.95	106.0	FUB-PP1750-5X54		5.00
300	119.95	118.0	FUB-PP1757-5X60		5.75
330	131.95	130.0	FUB-PP1765-5X66	17.0	6.50
360	143.95	142.0	FUB-PP1772-5X72		7.25
390	155.95	154.0	FUB-PP1780-5X78		8.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FUB-PPxyy-5Xxx-LF

SERIES
MALE
PRESS FIT
50:5.00mm
04:4.3mm
13:13.6mm
17:17.0mm
57:5.75mm
65:6.50mm
72:7.25mm
80:8.00mm
5X06:30WAY
5X78:390WAY

DESCRIPTION: H.D. Male 2.0mm Press Fit Type 5 Rows