
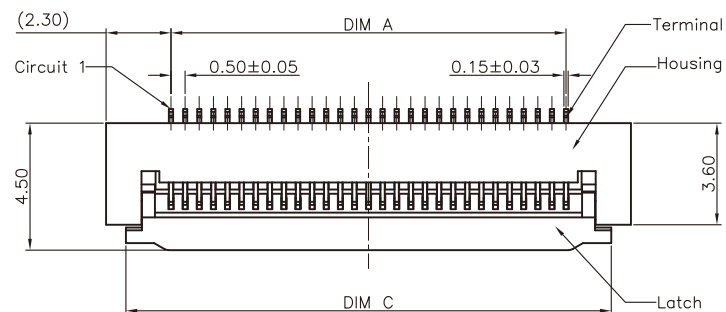



Material:

- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
- 1.2 Latch: thermoplastic high temp. UL94V-0; Color: Black.
- 1.3 Terminal: Copper Alloy.
- 1.4 Fitting Nail: Copper Alloy.

PIN NO.	DIM. A	DIM. B	DIM. C
4~N~50	NX0.5-0.5	NX0.5+0.6	NX0.5+2.7

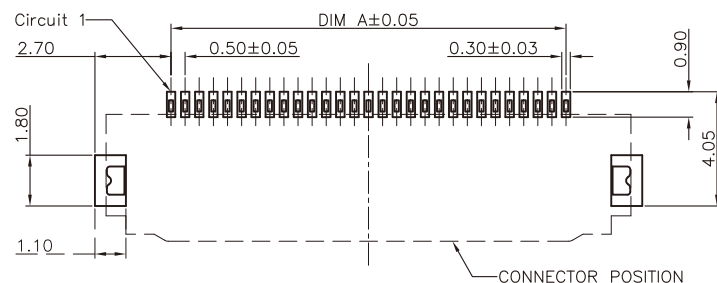

PCB LAYOUT

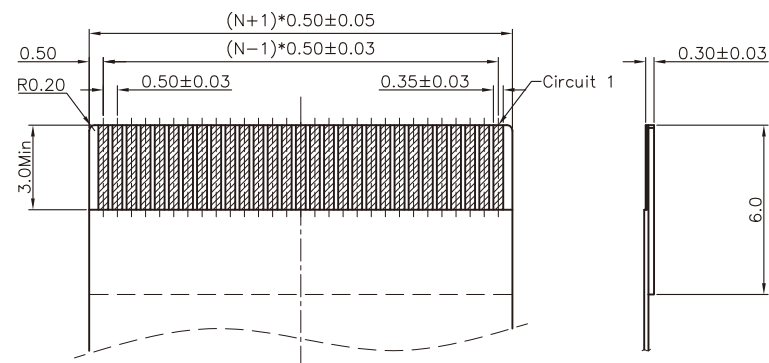

RECOMMENDED FFC/FPC DIM.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±




PPOJECTION



ORDER INFORMATION



FPV-WHB15R-xx-LF
SERIES | | | | LEADFREE
| | | | 04~50WAY
| | | | REEL
| | | | HIGH 1.5mm
90°SMT | | | | BOTTOM CONTACT
| | | | HINGED ZIF

DESCRIPTION: 0.5mm ZIF FPC CONNECTOR PIANO TYPE H=1.5

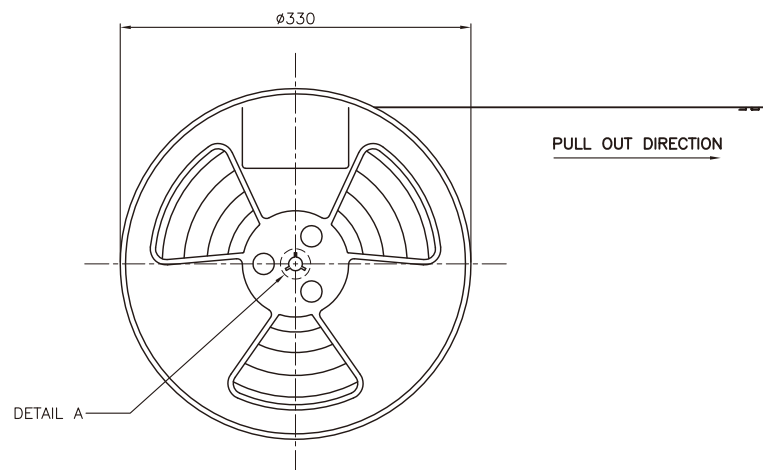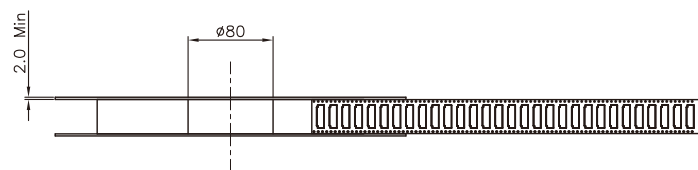

NOTES:

1. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
2. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
3. COMPONENT LOAD PER 13" REEL : 4000PCS.
4. PEELING OFF FORCE OF TOP TAPE 0.1N~1.0N.

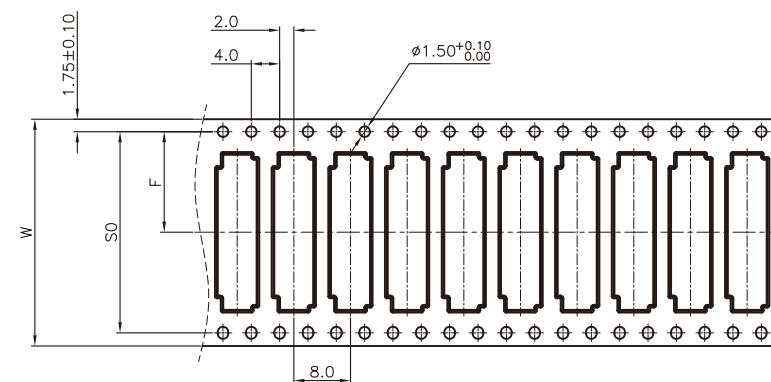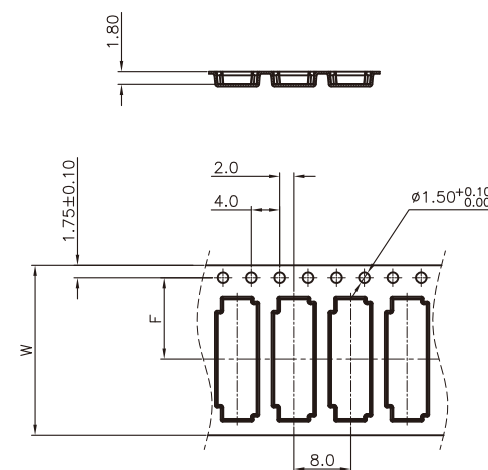

PIN No.	04~09	10~25	26~34	35~50
Reel Width	16.4	24.4	32.4	44.4
DIM W	16	24	32	44
DIM F	7.5	11.5	14.2	20.2
DIM SO	NA	NA	28.4	40.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION



ORDER INFORMATION

FPV-WHB15R-xx-LF
SERIES REEL
90°SMT
LEADFREE
04~50WAY
HIGH 1.5mm
BOTTOM CONTACT
HINGED ZIF

DESCRIPTION: 0.5mm ZIF FPC CONNECTOR Easy-On TYPE H=1.5 PACKING