



包裝方式: 單PCS八字理线, 200PCS袋.



PIN OUTS

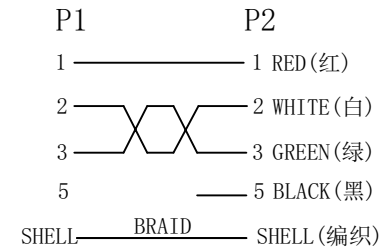

ELECTRONIC TEST CONDITION:
 100% OPEN SHORT & MISWIRE TEST.
 CONDCTIVE RESISTANCE:2Ω/MAX
 INSULATION RESISTANCE:20MΩ/MIN.AT DC 300V

PART LIST: 本产品均符合"ROHS"环保标准, 用的材料均为相当品。

4	OUTER MOLDED:45PVC BLACK.		KG/K
3	MICRO USB M :5P GOLD CONNECTOR,NICKEL PLAIED SHELL, PLASTLC:BLACK.	1	PCS
2	MICRO USB F :5P GOLD CONNECTOR,NICKEL PLAIED SHELL, PLASTLC:BLACK.	1	PCS
1	CABLE:UL2725 28AWG*1P+28AWG*2C+AL+B. OD:3.5MM COLOR:BLACK.	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±



ORDER INFORMATION

MIBX2-5B5B28-E1M-LF

SERIES | LEADFREE
 | 1000mm
 | MALE TO FEMALE
 | 28 AWG
 | 5 TO 5 PIN B TYPE

DESCRIPTION: USB MICRO F TO MICRO M 5P CABLE BLACK L=1000MM