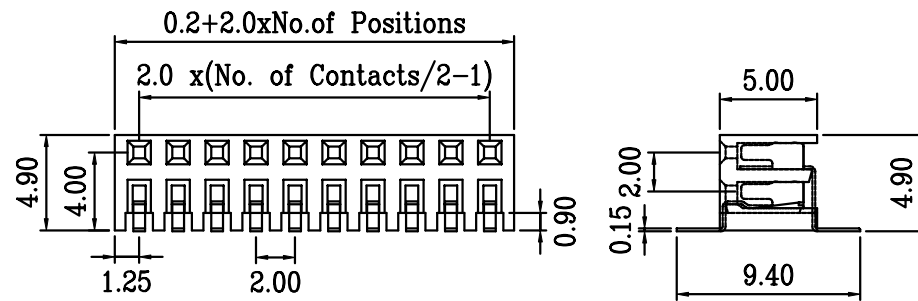


P.C.B.layout

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Contacts resistance :20 m ohms max.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40° – $+105^{\circ}$ C
- * Max Processing Temp: 230° for 30 seconds
(260° for 7 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P. (UL 94 V-0)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.50


.X, ± 0.35

.XX, ± 0.25

.XXX, ± 0.05

ANG $\pm$

PPOJECTION



ORDER INFORMATION

S-MX-2Xxx-LF
SERIES | LEADFREE
2X03:06WAY
2X50:100WAY
NON POST
SIDE ENTRY SMT

DESCRIPTION: 2.0mm Side Entry Female Socket Dual Row SMD type