

MATERIAL

Insulator : NYLON 66

Contact Pin : Phosphor Bronze


SPECIFICATION

Current Rate : 1 ampers MAX

Insulation Resistance : 1000 megohms Max

Contact Resistance : 30mΩMax.

Dielectric Withstanding Voltage : AC 650V volts RMS
at sea leve

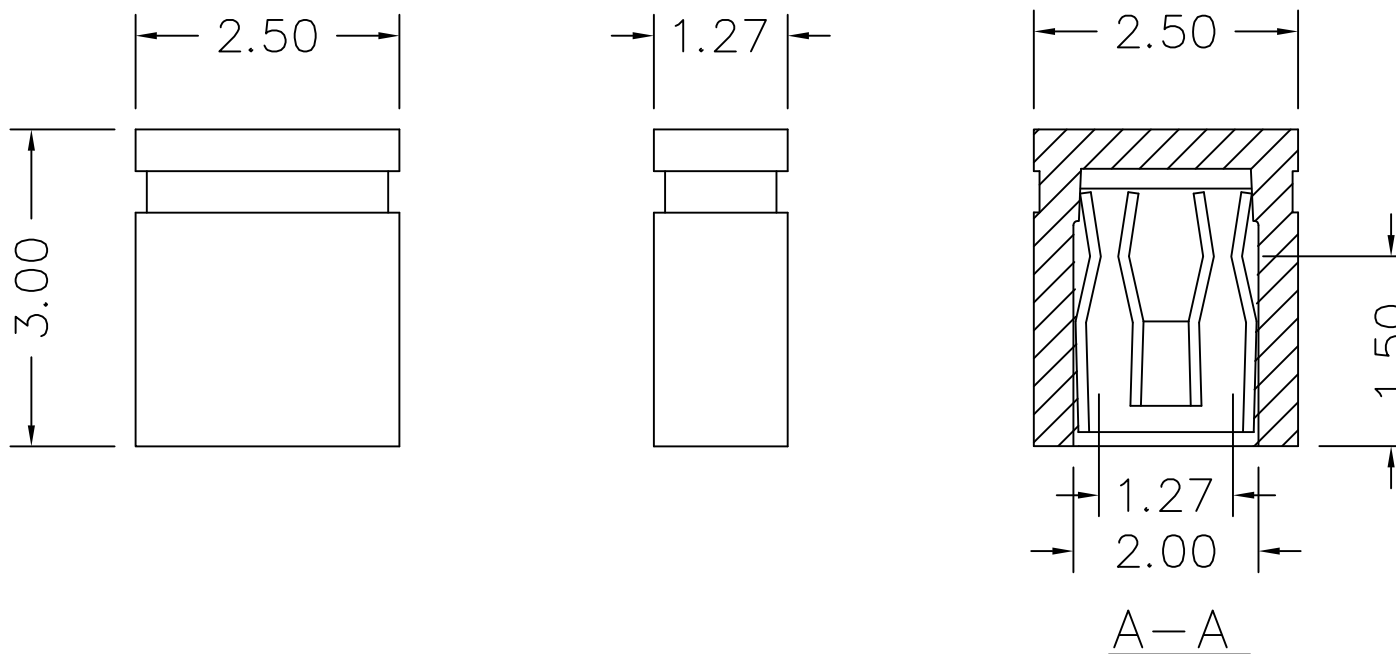

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°



ORDER INFORMATION

YJ-A-03-LF
SERIES | LEADFREE
HIGH 3.0mm
CLOSE

DESCRIPTION: