
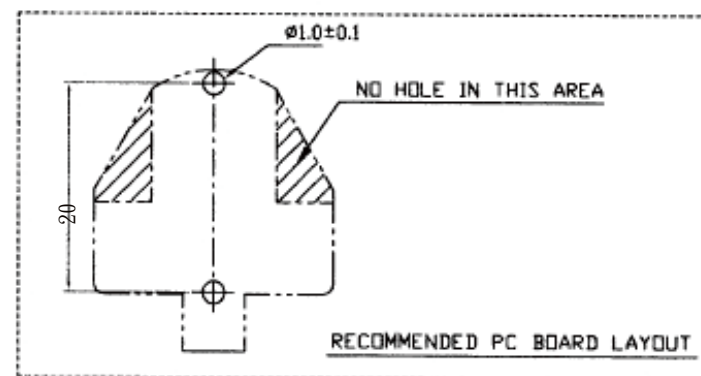
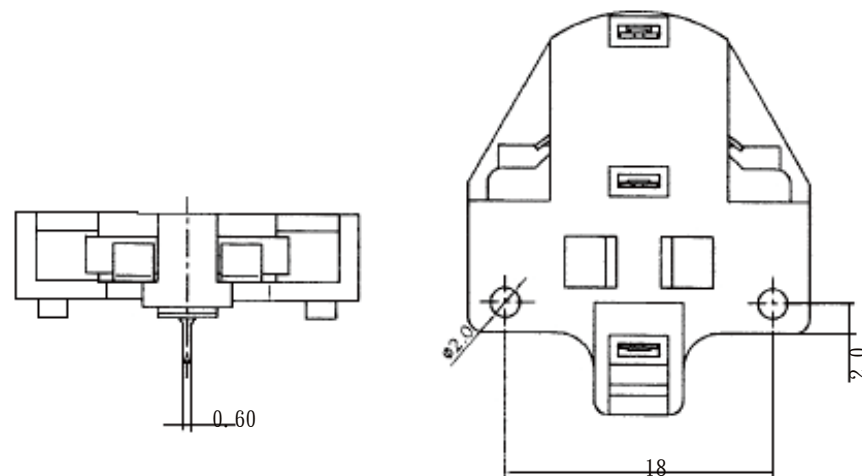


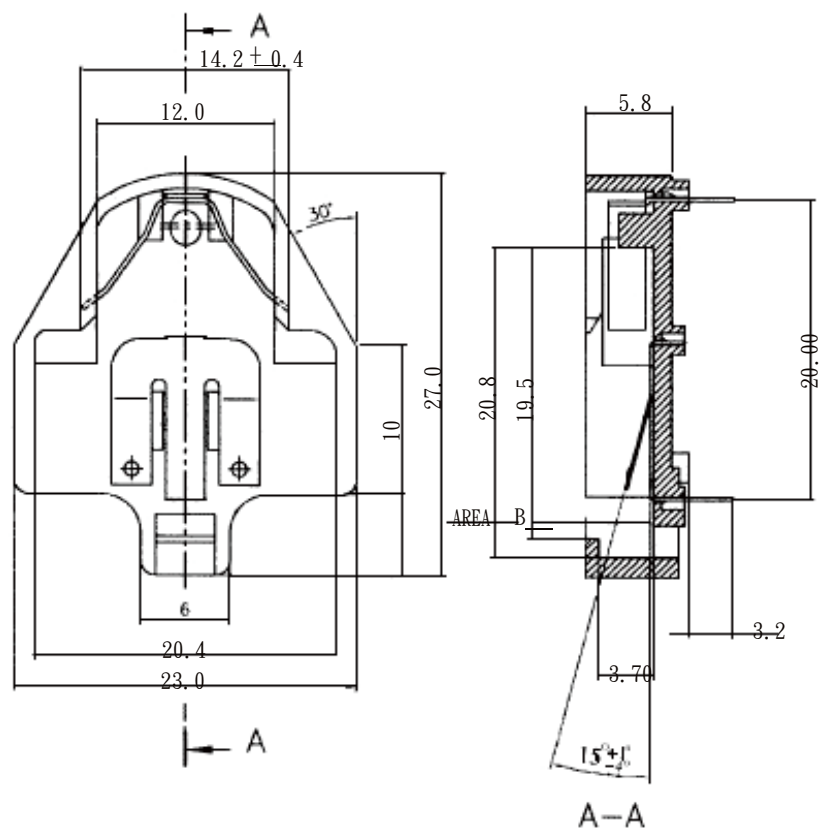

NOTE

1. MATERIALS: HOUSING PBT UL94V-0.
CONTACT PHOSPHOR BEONZE
2. PLATING:
 - 1) TIN/LEAD 90/10 100u" MIN, OVER Ni 50u" MIN
 - 2) NICKEL 80u" MIN.
3. FLASH, AREA B: NA. OTHERS 0.20mm MAX.
4. CAMBER: 0.05mm/cm MAX, DEFORMATION: NA,
WARPAGE: 0.05mm/cm MAX, TWIST: NA.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION



ORDER INFORMATION

BTH-D70-20-LF
SERIES | LEADFREE
FOR CR2032
HIGH 7.0mm
DIP 180°

DESCRIPTION: