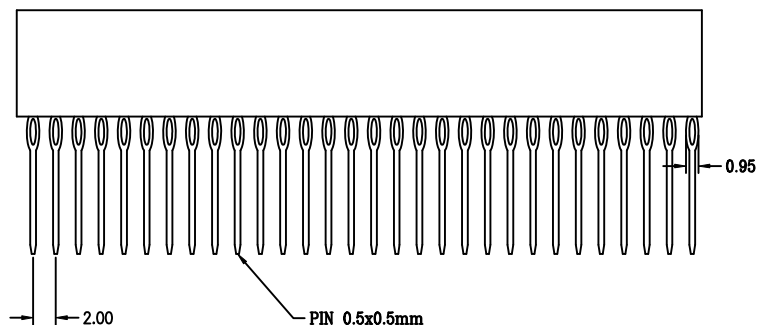
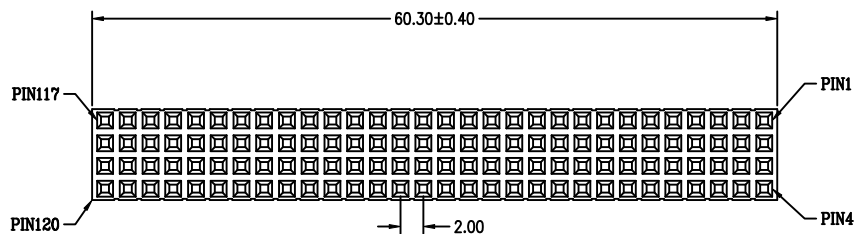


RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

CURRENT RATING: 2 AMP MAX.

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 1000V AC/DC

CONTACT RESISTANCE: 30m OHMS MAX.

OPERATING TEMPERATURE: -25°C ~ +85°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: NYLON 9T UL 94V-0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

SE-P21-120-LF
SERIES | LEADFREE
120 WAY
TOTAL HIGH 21.34mm
MALE

DESCRIPTION: PC-104 plus 120p type