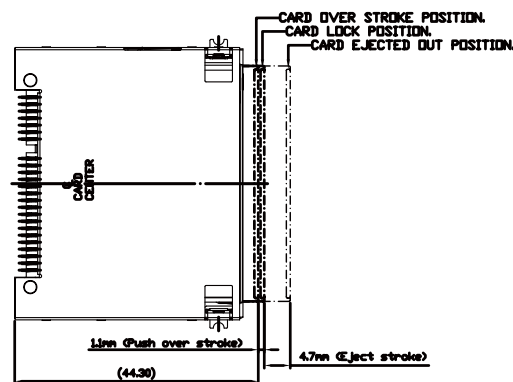
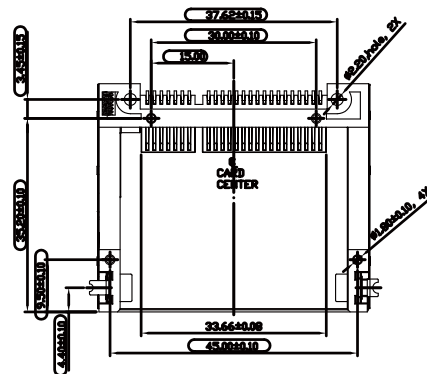



NOTES:

1. MATERIAL:

- 1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.
- 1-2 Slider : Engineering plastic , LCP with G.F reinforced , black per UL94 V-0 rate.
- 1-3 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t
- 1-4 Spring : Piano thread
- 1-5 Metal cover : Stainless steel sheet SUS304 0.2t.
- 1-6 Crank : Stainless rod SUS 304.
- 1-7 Card lock : Stainless steel SUS 304.

2. PLATING:

Contact area: 0.254 μm (10 μ " minimum) or 0.762 μm (30 μ ") gold plating

Solder zone: 2.54 μ m (100 μ ") matte Tin, 1.27 μ m (50 μ ") min. Nickel underplating over all.

3. RoHS compliant products.

- 1.CONTACT TYPE: Male
2.CONTACT NUMBER: 24
3.SHELL MATERIAL: Stainless steel
8.35H
4.SOLDER TAILS AREA PLATING: TIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±



ORDER INFORMATION

CFA-PW30CE221PP-24-LF

SERIES T T T T T T T T T T LEAD FREE

MALE 90°SMT PUSH 24WAY
PUSH

POST TO POST 30.0mm NORMAL STANDOFF 2.0mm

C TYPE EAR TYPE 2

DESCRIPTION: CFAST HOST CONNECTOR WITH PUSH-PUSH TYPE II,8.35H