
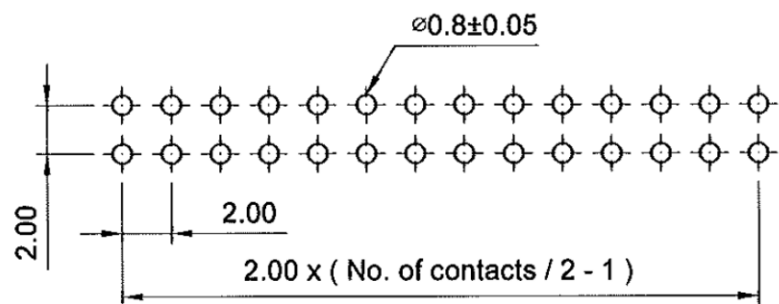
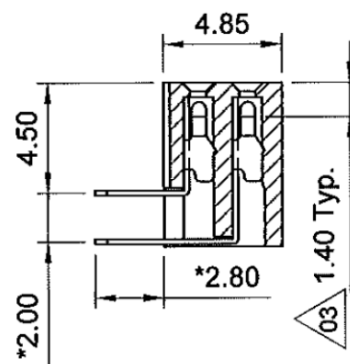
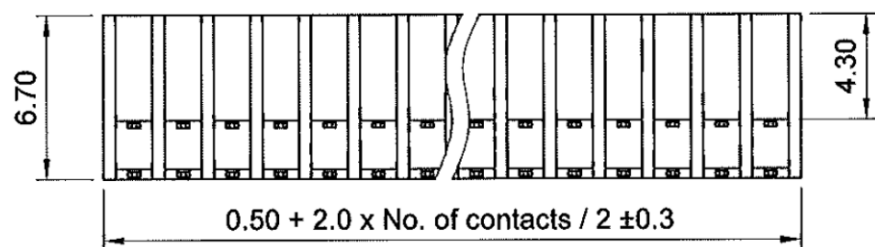


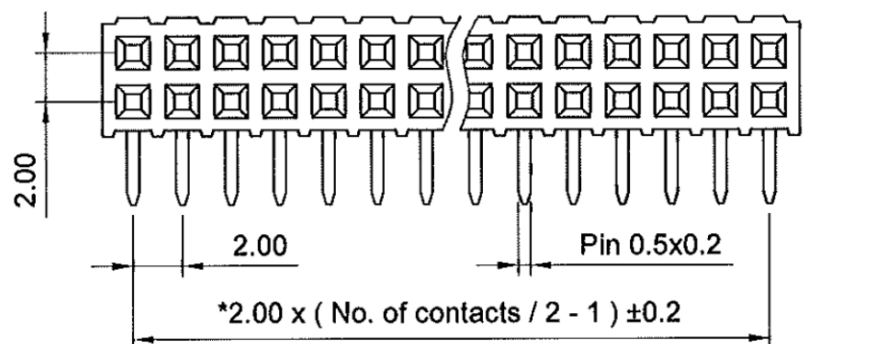

Recommended P.C.B. Layout

Specifications

Current & Voltage Rating : 2A & 20Vac max.

Insulation Resistance : 3000 MΩ min.

Contact Resistance : 20 mΩ max.

Dielectric Withstanding : AC 500 V

Operating Temperature : -40°C ~ +105°C

Max. Processing Temp. : 245±5°C for 3~5 seconds (NY6T)
260±10°C for 3~5 seconds (LCP)

Contact Material : Phosphor Bronze

Insulator Material : Nylon-6T / LCP, UL 94V-0 (Black) 02

Finish : 0.6μ" Gold plated on contact area

Packing : Tray / Tube 02

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

S-R67-2Xxx-LF
SERIES | LEADFREE
2X03:06WAY
DIP 90° | 2X40:80WAY
LONG 6.7mm

DESCRIPTION: