


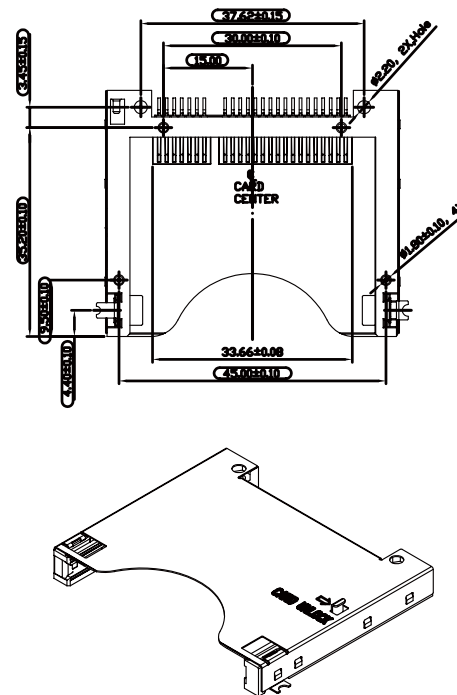

NOTES:

1. MATERIAL:

- 1-1 Housing : Engineering plastic , LCP with G.F reinforced ,
black per UL 94V-0 rate.
1-2 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t
1-3 Metal cover : Stainless steel sheet SUS304 0.2t.


2. PLATING:

Contact area: 0.254 μ m (10 μ " minimum) or 0.762 μ m (30 μ ") gold planting
Solder zone: 2.54 μ m (100 μ ") matte Tin 1.27 μ m (50 μ ") min. Nickel
underplating over all.

3. RoHS compliant products.

4. OPERATING TEMPERATURE: -40°C~+85°C

- 1.CONTACT TYPE: Male
2.CONTACT NUMBER: 24
3.SHELL MATERIAL: Stainless steel
6.05H LOCK
4.SOLDER TAILS AREA PLATING: TIN

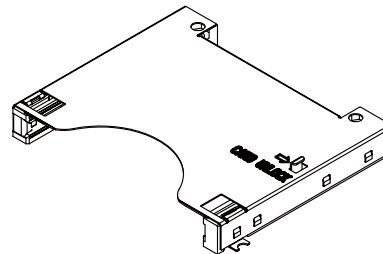

TOLERANCE: ± 0.05
RECOMMENDED P.C. BOARD LAYOUT

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

$X_i \pm$
$\bar{X} \pm 0.30$
$\bar{XX} \pm 0.20$


CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

SIZE A4

PPOJECTION



ORDER INFORMATION

CFA-PW30CE201PL-24-LF

SERIES

MALE

90°SMT

POST TO POST 30.0mm

C TYPE

EAR

TYPE 2

NORMAL

PUSH LOCK

24WAY

LEAD FREE

DESCRIPTION: CFAST HOST CONNECTOR LOCK TYPE II.



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com