


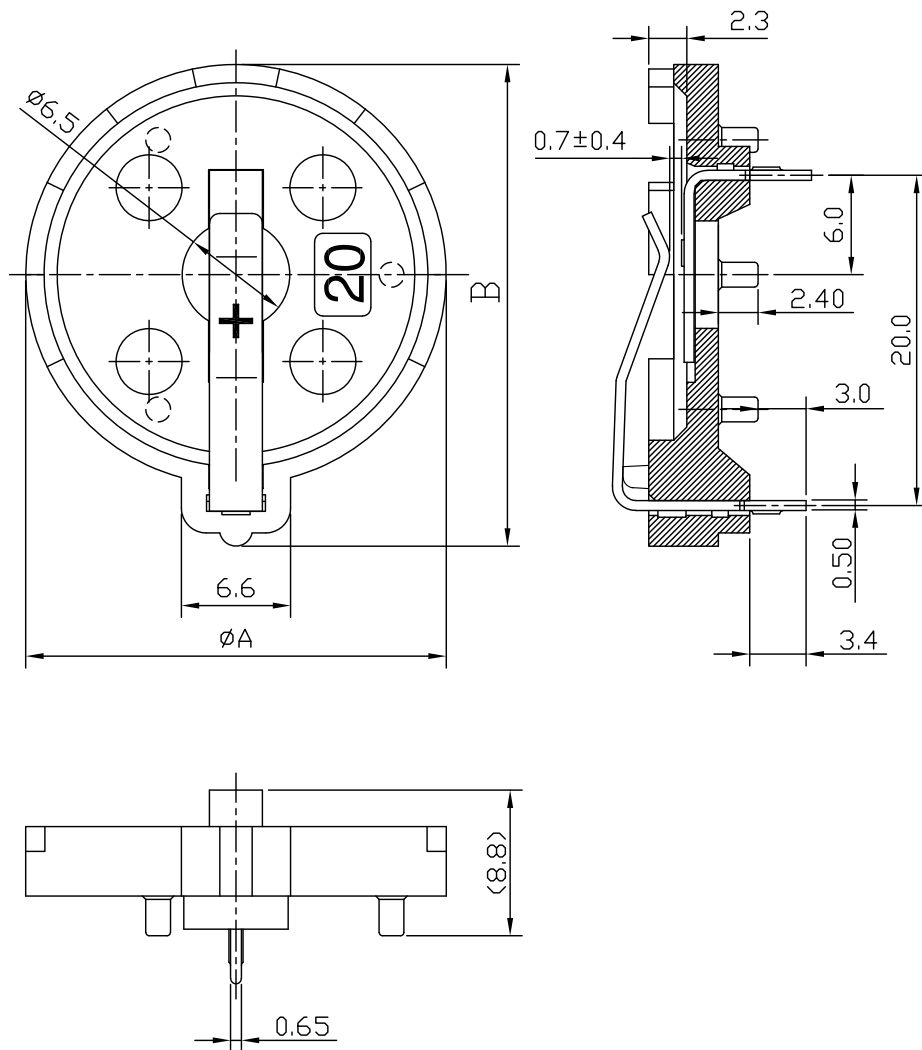

NOTES

1. MATERIALS:


HOUSING-PBT 30%GF UL94V-0.

CONTACT-PHOSPHOR BRONZE, C5191R-H T=0.5mm.

2. FLASH: 0.25mm MAX.

3. CAMBER: 0.13mm MAX. DEFORMATION: NA.

WARP: 0.13mm MAX. TWIST: NA.

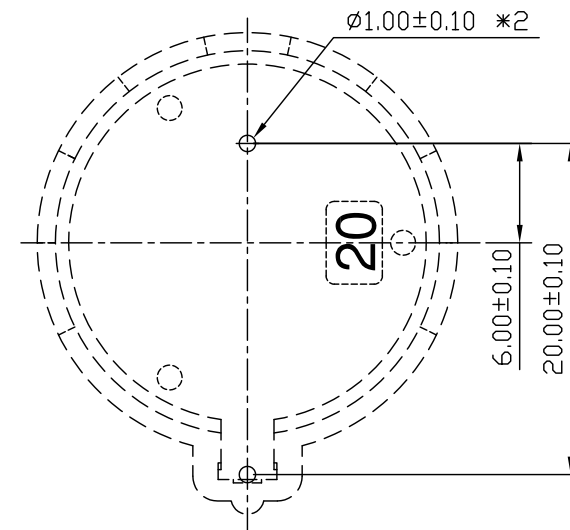

RECOMMEND PCB LAYOUT
COMPONENT SIDE

PART NO	ØA	B
BTH-D-20	22.8	27.8

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.13
.XXX ± 0.05
ANG ±

PPOJECTION



ORDER INFORMATION

BTH-D-20-LF
SERIES | LEADFREE
FOR2032
DIP 180°

DESCRIPTION: BATTERY HOLDER ASS'Y