




空2,4 偶數PIN

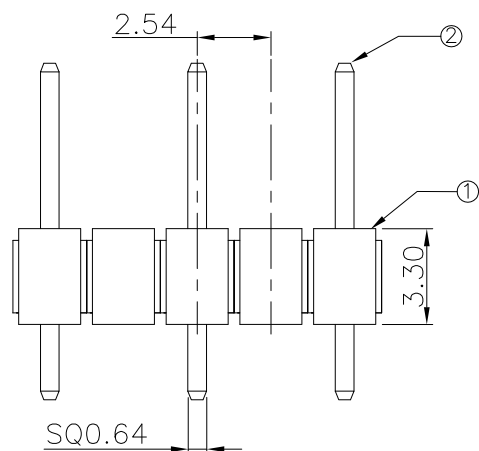

## P.C.B LAYOUT

L=11.6mm

| LTR                                                                                    | Part Name | Material         | Description                                                                        | QTY |
|----------------------------------------------------------------------------------------|-----------|------------------|------------------------------------------------------------------------------------|-----|
| 1                                                                                      | Housing   | Nylon<br>UL94V-0 | 260°C for 10 Seconds .<br>Initial : 1000M Ohms Min.<br>After Test : 500M Ohms Min. | 1   |
| 2                                                                                      | Contact   | Brass            | Current Rating : 2.0A<br>Initial : 20m Ohms Max.<br>After Test : 40m Ohms Max.     | XX  |
| Temperature Rating : -40°C ~ +125°C .<br>Dielectric Withstanding Voltage : 500V AC/Min |           |                  |                                                                                    |     |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50


.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 5°

PPOJECTION



### ORDER INFORMATION

MX-D116053030BKG-0503-LF  
 SERIES | DIP 180° TOTAL 11.6mm | CONTACT 5.3mm  
 GOLD | BLACK | 5P3C | LEADFREE

DESCRIPTION: 2.54mm Pin Header Straight Single Row