

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 300V AC/DC




Contact Resistance: 20m Ω Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
NYLON-6T

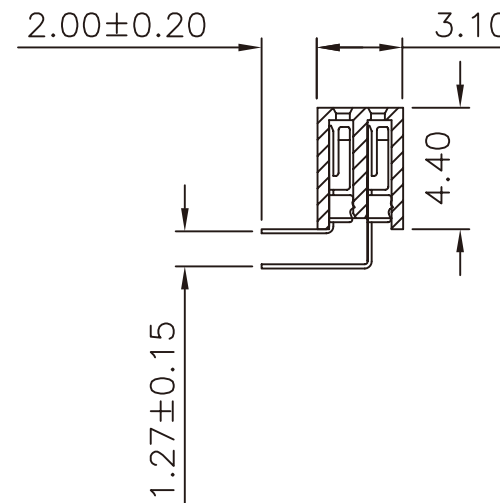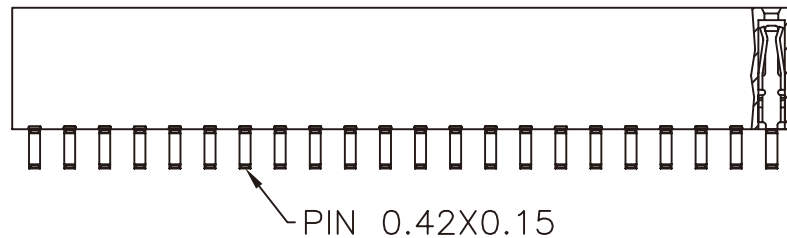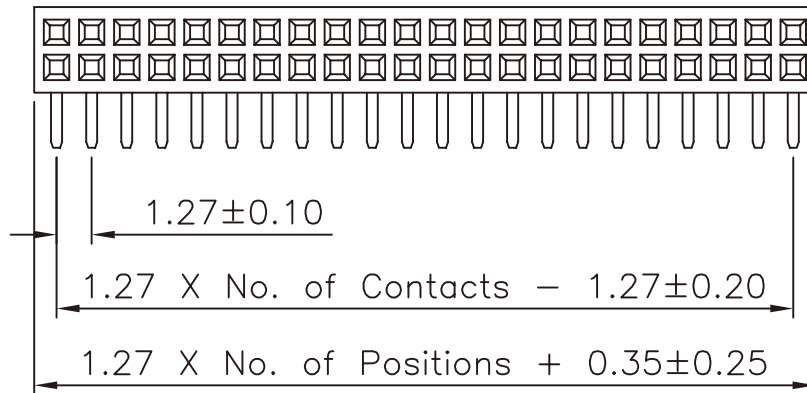

Recommended P.C.Board Hole Layout

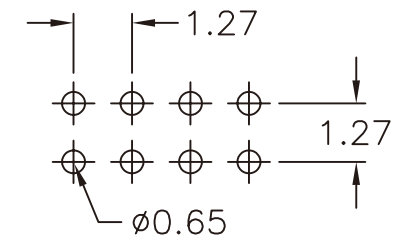

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.13
ANG $\pm$

P PROJECTION



ORDER INFORMATION

YA-R44-2Xxx-LF

SERIES LEADFREE
2X02:04WAY
2X50:100WAY
HIGH 4.4mm
DIP 90°

DESCRIPTION: 1.27 FEMALE HEADER 90° BASE 4.40