
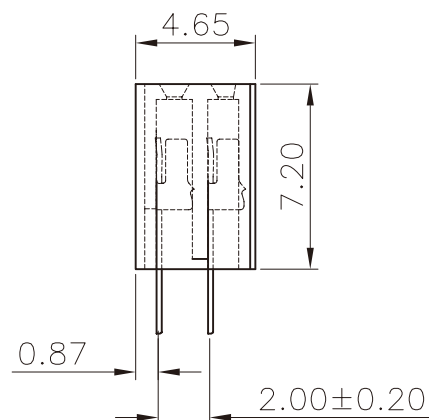
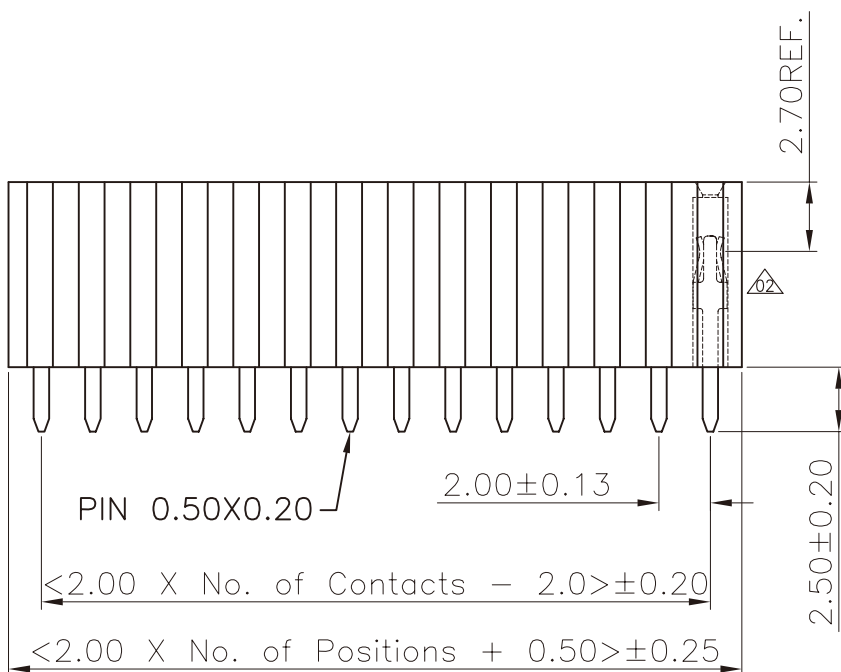


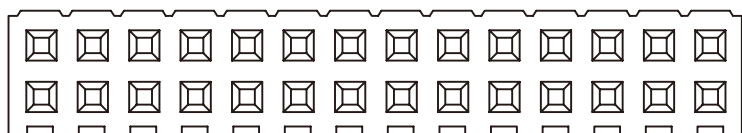

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 500V AC/DC

Contact Resistance: 20m Ω Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze


Insulation Material: Polyester, UL 94V-0

Nylon 6T (Processing temp, 260°C, 10sec)

Recommended P.C.Board

Hole Layout

(Tolerance: ± 0.05)

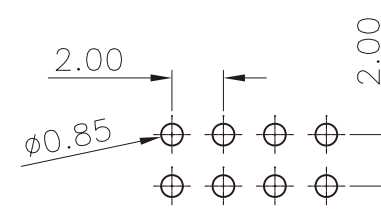

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

P PROJECTION



ORDER INFORMATION

S-D72-2Xxx-LF
 SERIES LEADFREE
 2X03:06WAY
 2X40:80WAY
 HIGH 7.2mm
 DIP 180°

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROWS DIP TYPE BASE 7.20H