


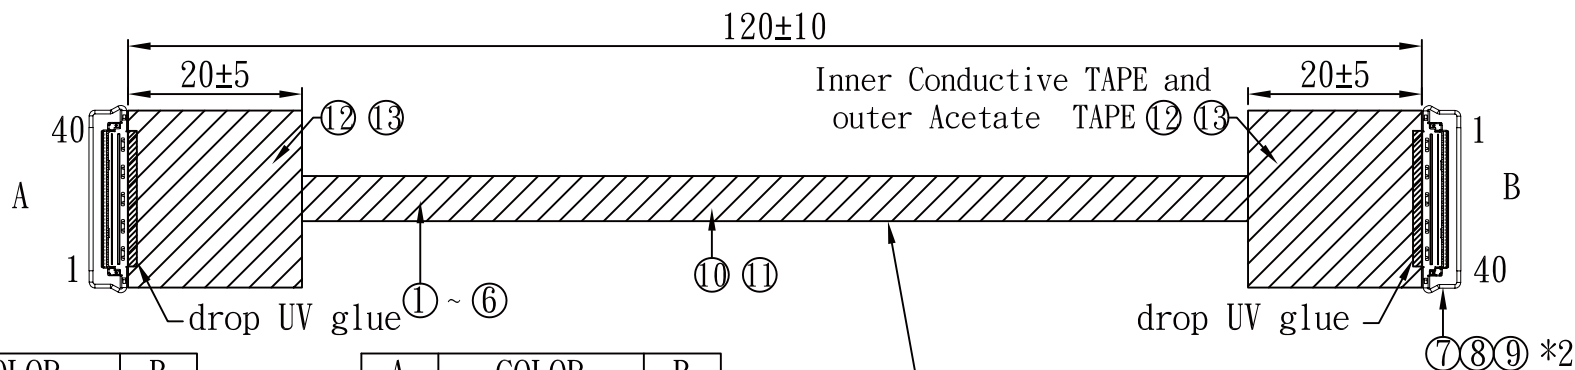

A	COLOR	B
1	RED	1
2	RED	2
3	RED	3
4	BLACK	4
5	BLACK	5
6	BLACK	6
7	BLUE	7
8	WHITE	8
13	RED	13
14	RED	14
15	BLACK	15
16	BLACK	16
17	RED	17
18	WHITE	18
19	BLUE	19
20	WHITE	20
21	BLUE	21

TWIST
TWIST
TWIST

A	COLOR	B
22	WHITE	22
23	BLUE	23
24	BLACK	24
25	WHITE	25
26	BLUE	26
27	BLACK	27
28	WHITE	28
29	BLUE	29
30	WHITE	30
31	BLUE	31
32	WHITE	32
33	BLUE	33
34	BLACK	34
35	WHITE	35
36	BLUE	36
37	WHITE	37
38	BLUE	38
39	WHITE	39
40	BLUE	40

TWIST
TWIST
TWIST
TWIST
TWIST
TWIST
TWIST
TWIST

Conductive throughout the entire on wire harness
External acetic acid tape wrapping
Conductive cloth is attached to the iron shell

NO.	ITEM.	DESCRIPTION	Q'TY
1	WIRE:	UL10064 #32 RED	6PCS
2	WIRE:	UL10064 #32 BLACK	8PCS
3	WIRE:	UL10064 #32 WHITE	1PCS
4	WIRE:	UL10064 #32 BLUE	1PCS
5	WIRE:	UL10064 #32 WHITE	10PCS
6	WIRE:	UL10064 #32 BLUE	10PCS
7	HOUSING:	LV03140-23201	2PCS
8	SHELL:	LV03140T11402	2PCS
9	PULL BAR:	LV03140B50003	2PCS
10	Conductive TAPE:	W:10	1PCS
11	Acetate TAPE:	W:10 BLACK	1PCS
12	Conductive TAPE:	W:18	2PCS
13	Acetate TAPE:	W:20 BLACK	2PCS

- NOTES:
1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.
ELECTRICAL TESTING:
1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

CVSX2-404032-M12C-LF

SERIES

LEADFREE

120mm
MALE
32 AWG
40 TO 40 WAY

DESCRIPTION: CABLE ASS"Y