


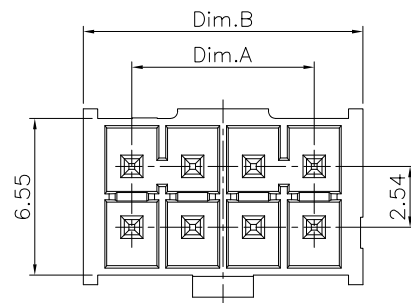

Dimension Information:

Pin.No	Dim.A	Dim.B	Pin.No	Dim.A	Dim.B
4	2.54	6.60	18	20.32	24.38
6	5.08	9.14	20	22.86	26.92
8	7.62	11.68	22	25.40	29.46
10	10.16	14.22	24	27.94	32.00
12	12.70	16.76	26	30.48	34.54
14	15.24	19.30	28	33.02	37.08
16	17.78	21.84	30	35.56	39.62

Specifications:

Current Rating: 3.0A AC,DC

Voltage Rating: 675V AC,DC

Contact Resistance: 20m ohm.Max

Insulation Resistance: 1000M ohm.Min

Withstanding Voltage: 1000V AC/Minute

Operating Temperature Range: -55°C~+125°C





Material:

Insulator: LCP(UL94V-0)

Insulator Color: Natural Or Black

Contact: Brass

Plated: Gold/Matte Tin/Selective Gold Plated

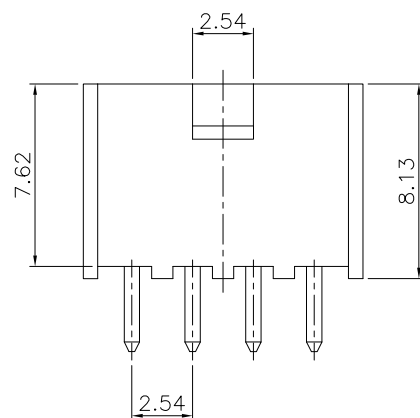

P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±



ORDER INFORMATION

MNM-PDXK-2Xxx-LF
SERIES | | | LEADFREE
2X02:04WAY
2X15:30WAY
KEYWAY
MALE | NON POST
DIP 180°

DESCRIPTION: 2.54mm Wire To Board Wafer Straight Type