

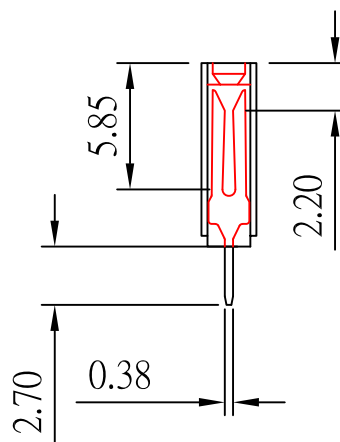
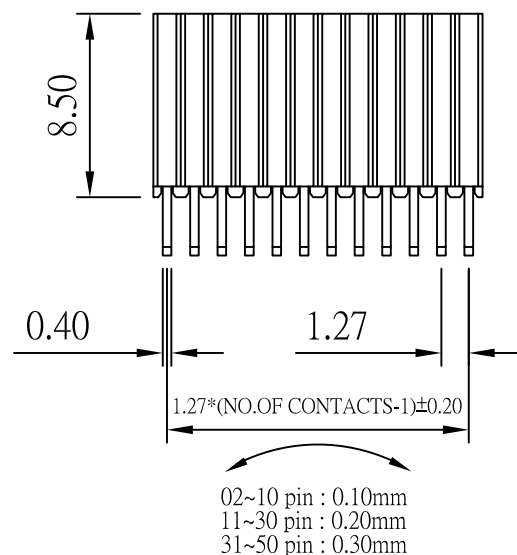


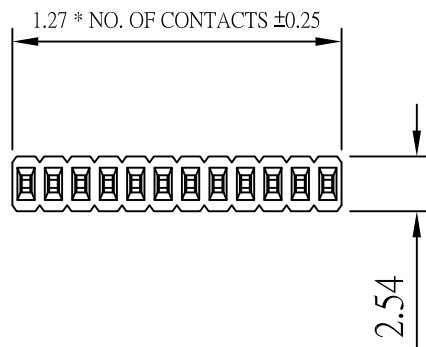

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature
 Plastic,UL 94V-0
 Finish: Standard: Gold Flash all over

Recommended P.C. Board
 Hole Layout

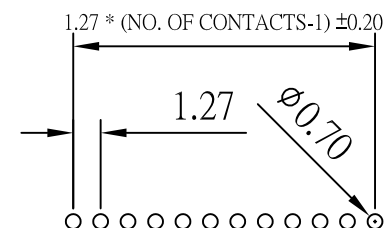

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG $\pm$

PPOJECTION



ORDER INFORMATION

Y-D85-1Xxx-LF
 SERIES | LEADFREE
 1X03:03WAY
 1X50:50WAY
 HIGH 8.5mm
 DIP 180°

DESCRIPTION: