


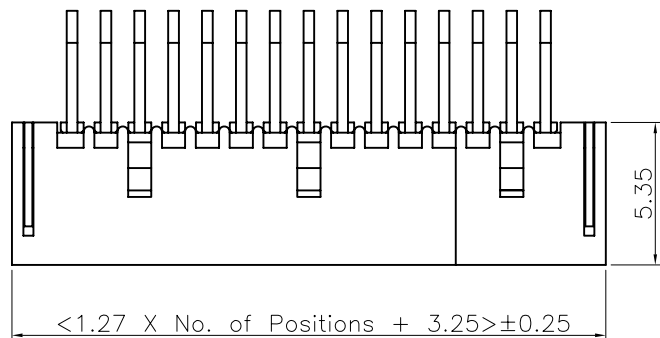


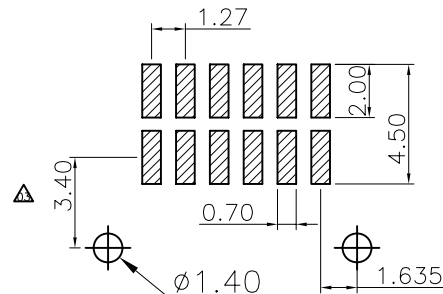

Recommended P.C.Board Layout
(Tolerance: ± 0.05)

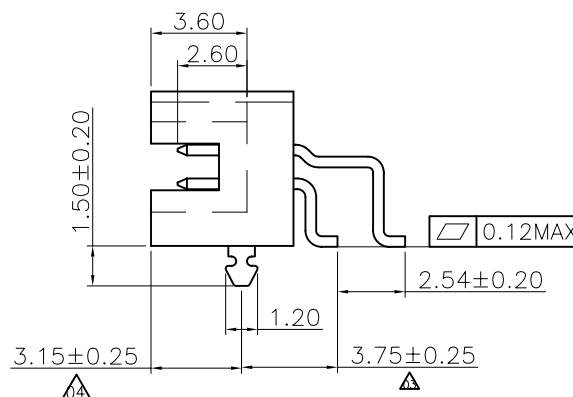

Specifications
Current Rating: 1.0Amp
Insulation Resistance: 1000M Ω Min.
Dielectric Withstanding Voltage: 300VAC
Contact Resistance: 20m Ω Max.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulator Material: High Temperature
Thermoplastic, UL 94V-0 LCP(Nylon) or the equivalent material

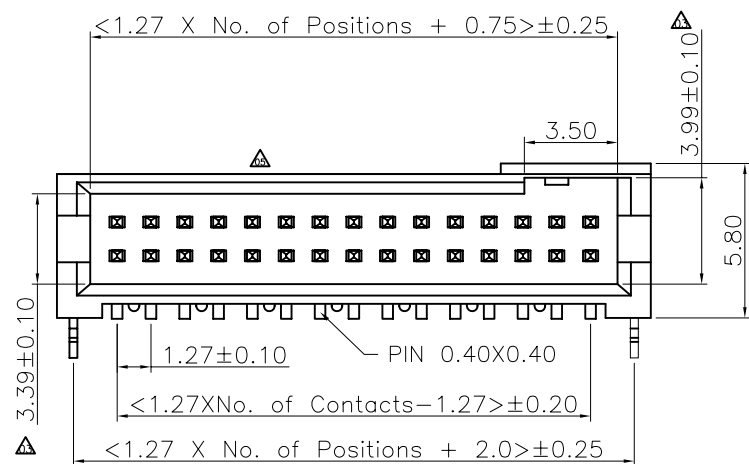

No. of Pins per Row
05.06.08.10.15
20.22.24.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X. ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG $\pm$

PPOJECTION



ORDER INFORMATION

PAB-WZ-2Xxx-LF
SERIES | LEADFREE
2X05:10WAY
2X30:60WAY
CLIP
90°SMT

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS SMT TYPE SIDE ENTRY