


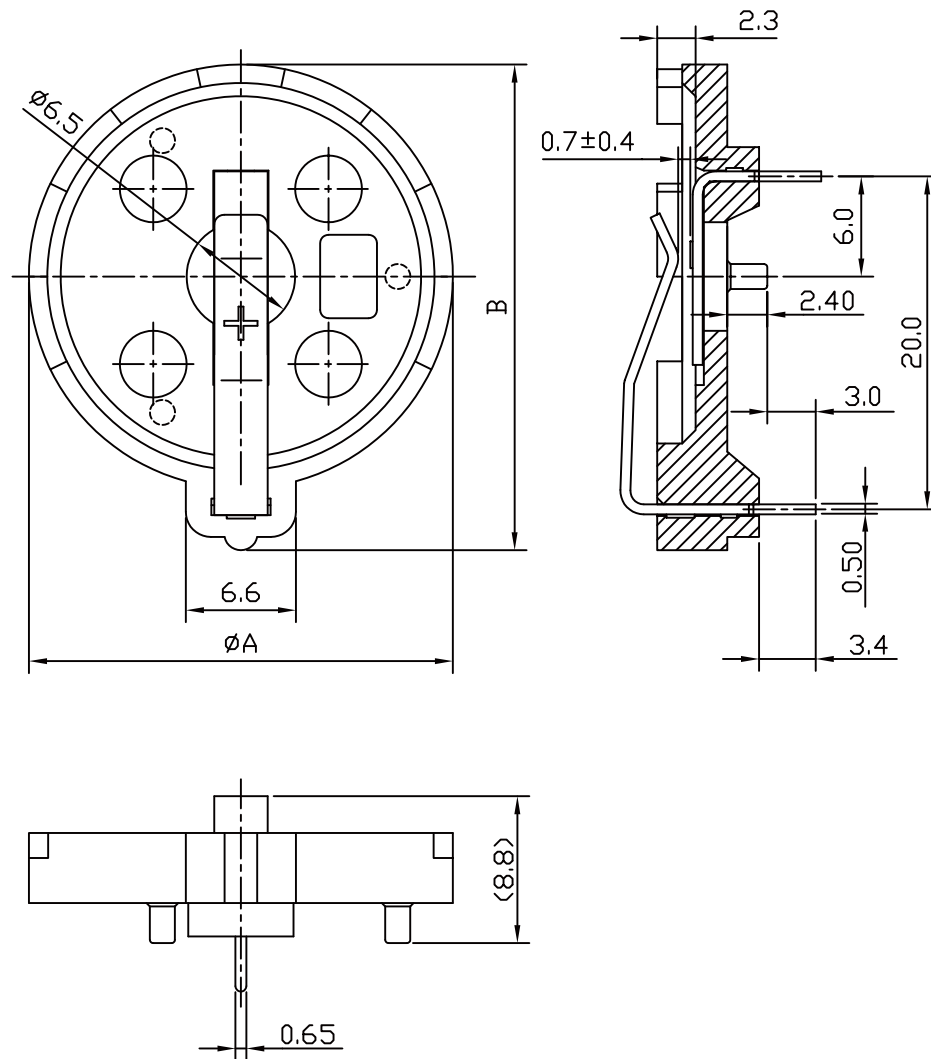

NOTES

1. MATERIALS:


HOUSING-PBT 30%GF UL94V-0.

CONTACT-PHOSPHOR BRONZE, C5191R-H T=0.6mm.

2. FLASH: 0.25mm MAX.

3. CAMBER: 0.13mm MAX. DEFORMATION: NA.

WARP: 0.13mm MAX. TWIST: NA.

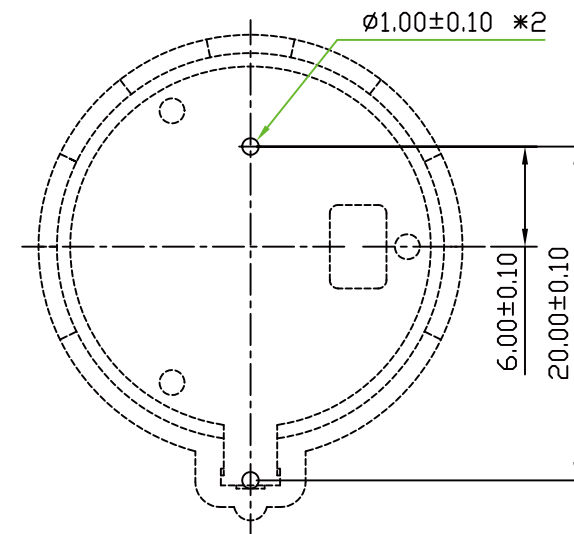

RECOMMEND PCB LAYOUT COMPONENT SIDE

PART NO	øA	B	
BTH-D-23	25.4	29.0	FOR CR2325

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°



ORDER INFORMATION

BTH-D-23-LF

SERIES

LEADFREE

FOR CR2325

DIP 180°

DESCRIPTION: **BATTERY HOLDER ASS'Y**