
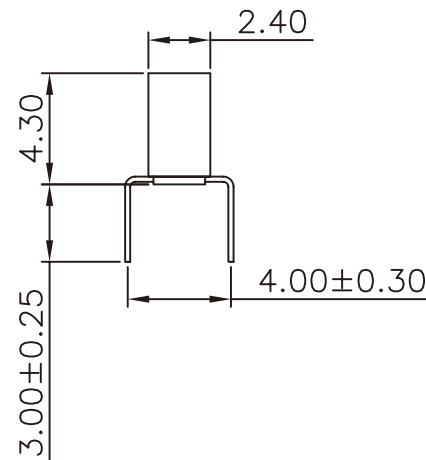
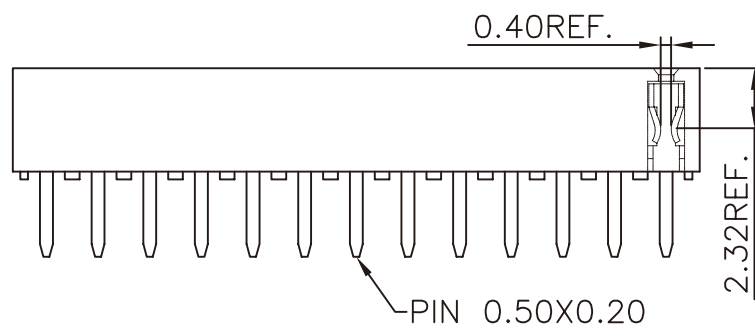


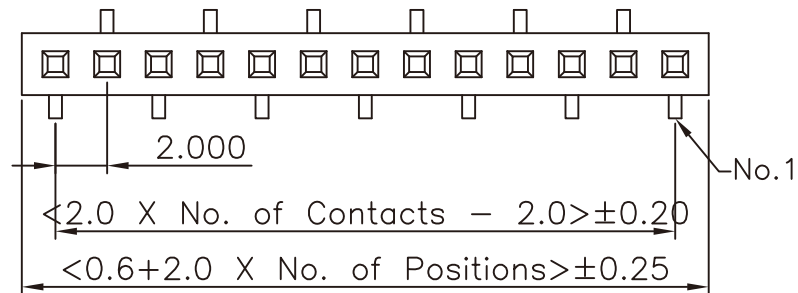


Specifications

- Current Rating: 2Amp
- Insulation Resistance: 1000M Ω Min.
- Dielectric Withstanding: 500V AC
- Contact Resistance: 20m Ω Max.
- Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
Nylon 6T

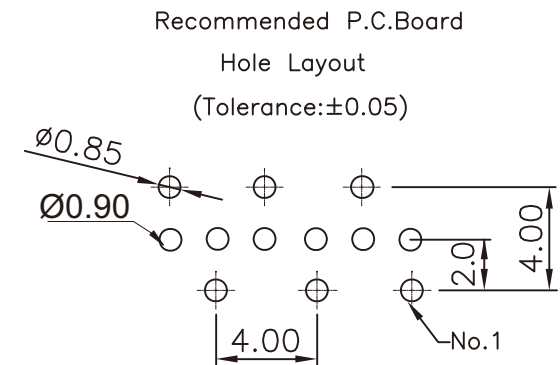

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

P PROJECTION



ORDER INFORMATION

S-B40-1XxxR-LF

SERIES | LEADFREE
R TYPE FOOT POSITION

1X02:02WAY
1X40:40WAY
BOTTOM ENTRY 4.0mm

DESCRIPTION: 2.00 FEMALE HEADER SINGLE ROW DIP TYPE BASE 4.30H