

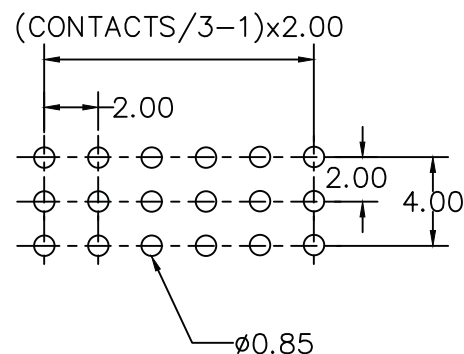
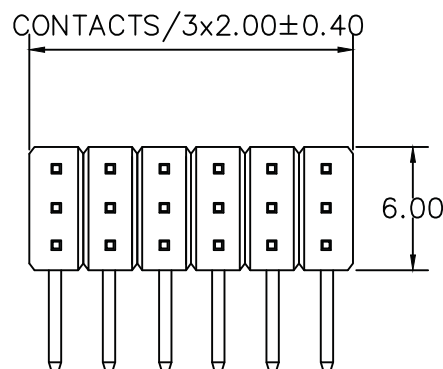


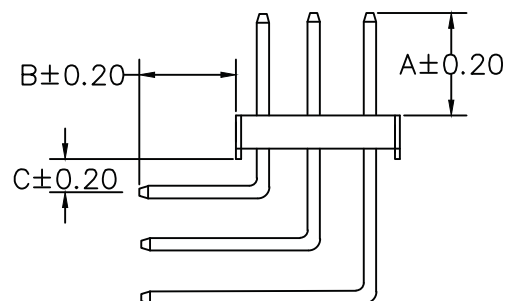

RECOMMENDED P.C.B LAYOUT

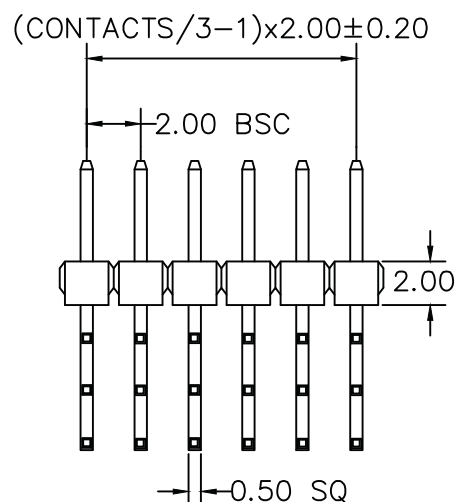

A: 3.90 mm B: 2.80 mm C: 1.00 mm

CONTACTS	
3X2	3X21
3X3	3X22
3X4	3X23
3X5	3X24
3X6	3X25
3X7	3X26
3X8	3X27
3X9	3X28
3X10	3X29
3X11	3X30
3X12	3X31
3X13	3X32
3X14	3X33
3X15	3X34
3X16	3X35
3X17	3X36
3X18	3X37
3X19	3X38
3X20	3X39
	3X40

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE: AC 1000V RMS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°



ORDER INFORMATION

M-R-3Xxx-LF
SERIES LEADFREE
3X02:06WAY
3X40:120WAY
DIP 90°

DESCRIPTION: PIN HEADER 2.00*2.00mm
RIGHT ANGLE TYPE,TRIPLE ROWS