

NOTE:**1.MATERIAL:**



HOUSING: HIGH TEMPERATURE THERMOPLASTIC. COLOR: NATURAL.
ACTUATOR: HIGH TEMPERATURE THERMOPLASTIC. COLOR: BLACK.
TERMINAL: COPPER ALLOY.
HOLDDOWN: COPPER ALLOY.

2.FINISH:**TERMINAL:**





100u" MIN. TIN PLATING OR G/F GOLD PLATING WITH
50u" MIN. NICKEL UNDERPLATED OVERALL.

HOLDDOWN:

100u" MIN. TIN PLATING WITH
50u" MIN. NICKEL UNDERPLATED OVERALL

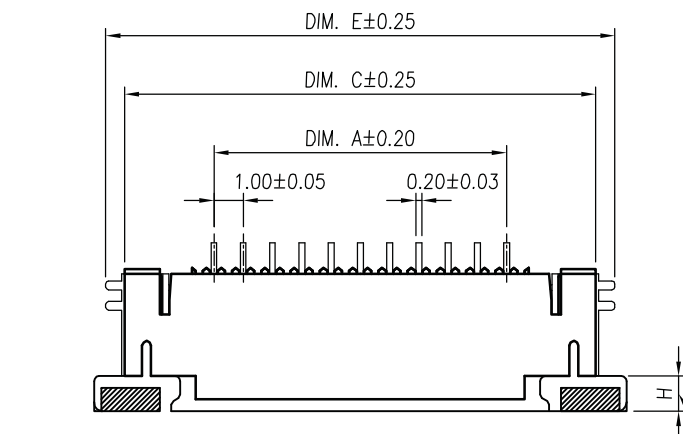**SECTION A-A**

H=0.80mm: 4 ~ 14 PIN
H=1.20mm: 15 ~ 30 PIN

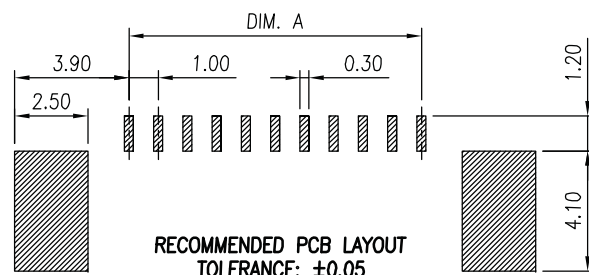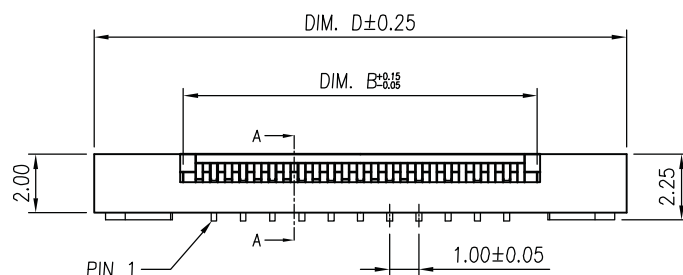

FFC/FPC DIMENSION
THICKNESS 0.30±0.03 mm

DIMENSION TABLE

Pos.	Dimension					
	A	B	C	D	E	F
4	3.00	5.10	9.10	11.20	10.40	4.30
5	4.00	6.10	10.10	12.20	11.40	4.30
6	5.00	7.10	11.10	13.20	12.40	4.30
7	6.00	8.10	12.10	14.20	13.40	4.30
8	7.00	9.10	13.10	15.20	14.40	4.30
9	8.00	10.10	14.10	16.20	15.40	4.30
10	9.00	11.10	15.10	17.20	16.40	4.30
11	10.00	12.10	16.10	18.20	17.40	4.30
12	11.00	13.10	17.10	19.20	18.40	4.30
13	12.00	14.10	18.10	20.20	19.40	4.30
14	13.00	15.10	19.10	21.20	20.40	4.30
15	14.00	16.10	20.10	22.20	21.40	4.70
16	15.00	17.10	21.10	23.20	22.40	4.70
17	16.00	18.10	22.10	24.20	23.40	4.70
18	17.00	19.10	23.10	25.20	24.40	4.70
19	18.00	20.10	24.10	26.20	25.40	4.70
20	19.00	21.10	25.10	27.20	26.40	4.70
21	20.00	22.10	26.10	28.20	27.40	4.70
22	21.00	23.10	27.10	29.20	28.40	4.70
23	22.00	24.10	28.10	30.20	29.40	4.70
24	23.00	25.10	29.10	31.20	30.40	4.70
25	24.00	26.10	30.10	32.20	31.40	4.70
26	25.00	27.10	31.10	33.20	32.40	4.70
27	26.00	28.10	32.10	34.20	33.40	4.70
28	27.00	29.10	33.10	35.20	34.40	4.70
29	28.00	30.10	34.10	36.20	35.40	4.70
30	29.00	31.10	35.10	37.20	36.40	4.70

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

**ORDER INFORMATION**

FPA-WZA22-xx-LF
SERIES | | LEADFREE
| | 04~30WAY
| | HIGH 2.25mm
| | UPPER CONTACT
| ZIF
| 90°SMT

DESCRIPTION: FPC/FFC 1.0mm PITCH ZIF SMT TYPE CONNECTOR

FPC PACKING

1. 適用範圍:

適用於 FPC 0.5/1.0mm PITCH ZIF SMT SIDE ENTRY TYPE 產品。

2. 包裝方式:

成品以Tube管包裝，每一Tube管之包裝數量如(表一)所示，每管前、後出口以塑膠軟塞塞住，每二十管以橡皮筋綁成一捆，每一小箱放置45捆共900管，一大箱共可放置兩小箱。


3. 包裝規格:

- 3.1 尺寸: 1. Tube - 636mm(L) X 7.20mm(W) X 3.70mm(H)
 2. Carton(1) - 645mm(L) X 195mm(W) X 14mm(H)
 3. Carton(2) - 657mm(L) X 310mm(W) X 210mm(H)

- 3.2 材質: 1. Tube : 塑膠聚氣乙烯(PVC)
 2. Carton: 瓦楞紙(Corrugated paper)

- 3.3 顏色: 1. Tube : 透明(Transparent)
 2. Carton: 本色

- 3.4 數量、淨重、毛重: 如(表一)

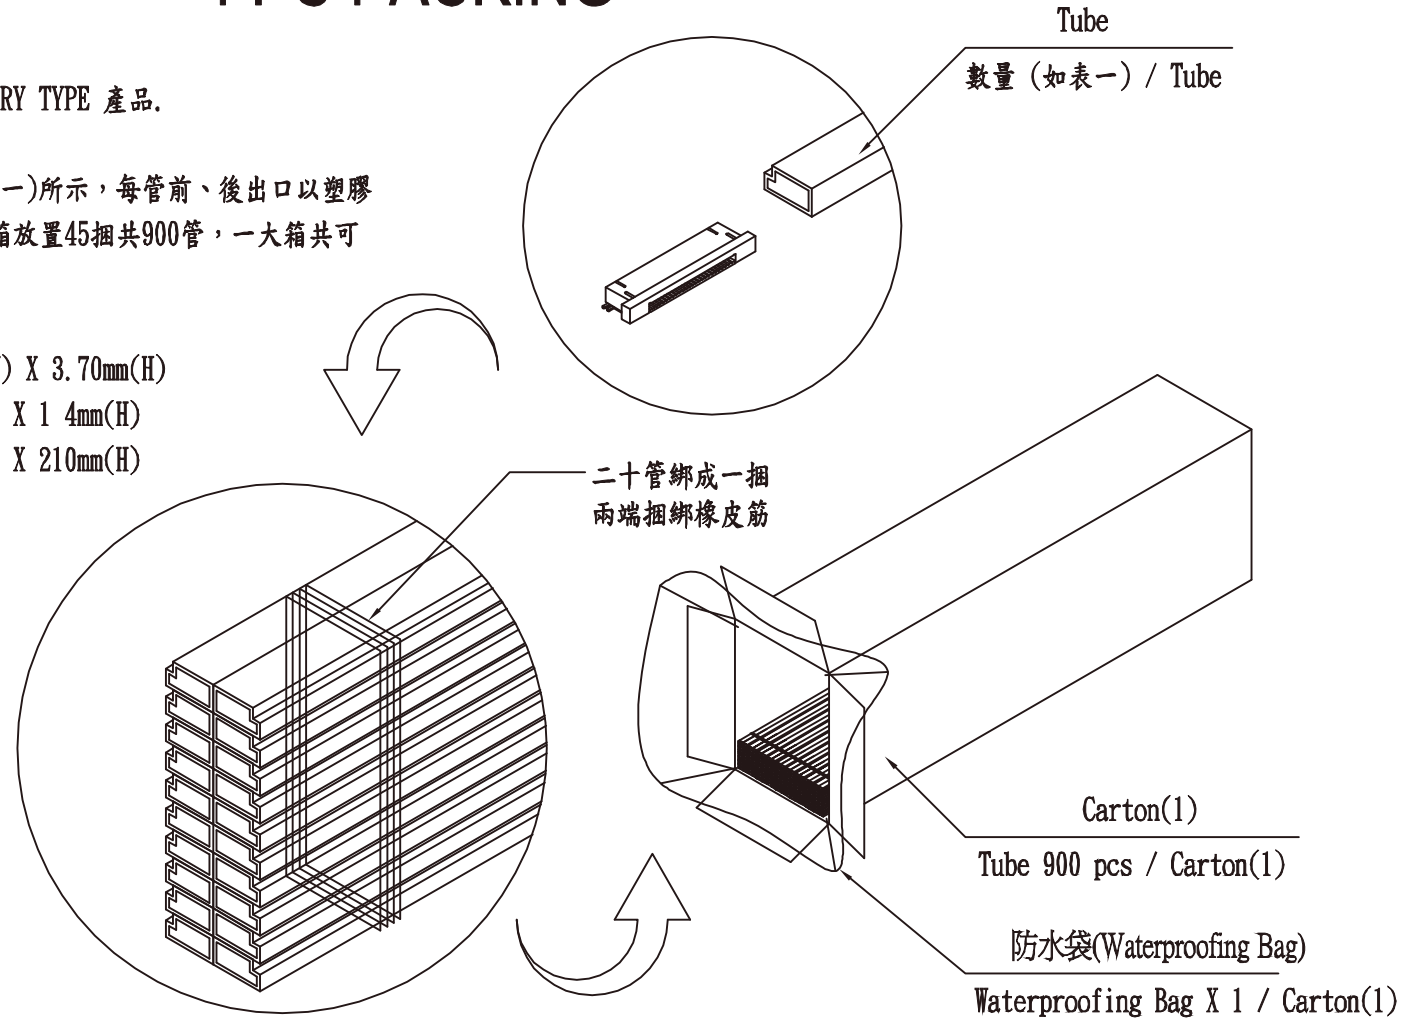

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40


.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION




ORDER INFORMATION

FPA-WZA22-xx-LF
 SERIES | | | LEADFREE
 | | | 04~30WAY
 | | | HIGH 2.25mm
 | | | UPPER CONTACT
 | ZIF
 | 90°SMT

DESCRIPTION: FPC/FFC 1.0mm PITCH ZIF SMT TYPE CONNECTOR

FPC PACKING

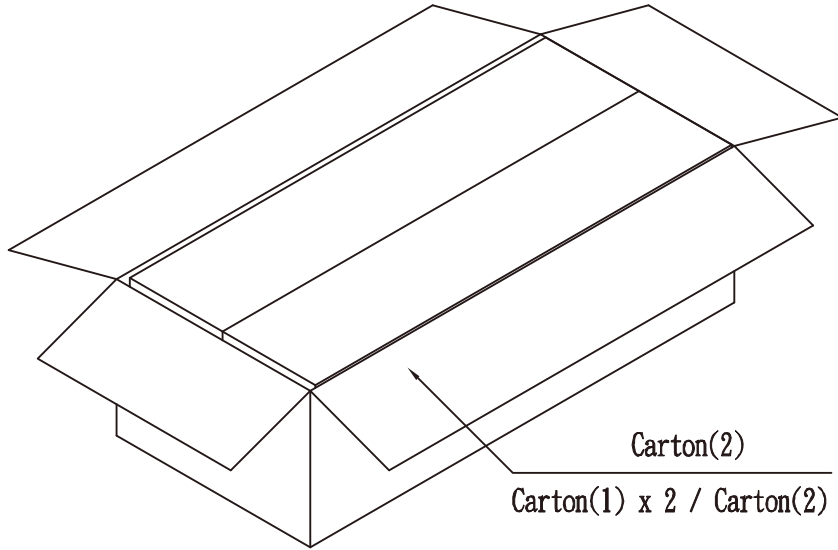

(UNIT: PCS)

(表一)

NO. OF CONTACTS		NUMBER			N.W(KG)		G.W(KG)		NO. OF CONTACTS		NUMBER			N.W(KG)		G.W(KG)	
0.5 PITCH	1.0 PITCH	Tube	Carton1	Carton2	0.5 PITCH	1.0 PITCH	0.5 PITCH	1.0 PITCH	0.5 PITCH	1.0 PITCH	Tube	Carton1	Carton2	0.5 PITCH	1.0 PITCH	0.5 PITCH	1.0 PITCH
3		76	68400	136800	16.83		34.02		33	16	26	23400	46800	19.86	16.12	37.05	33.31
4		71	63900	127800	16.93		34.12		34		26	23400	46800	20.32		37.51	
5		67	60300	120600	17.13		34.32		35	17	25	22500	45000	19.98	16.17	37.17	33.36
6		64	57600	115200	17.45		34.64		36		25	22500	45000	20.42		37.61	
7		61	54900	109800	17.68		34.87		37	18	24	21600	43200	20.03	16.17	37.22	33.36
8		58	52200	104400	17.80		34.99		38		24	21600	43200	20.45		37.64	
9	4	55	49500	99000	17.82	15.49	35.01	32.68	39	19	23	20700	41400	20.00	16.11	37.19	33.30
10		53	47700	95400	18.08		35.27		40		23	20700	41400	20.41		37.60	
11	5	51	45900	91800	18.27	15.68	35.46	32.87	41	20	22	19800	39600	19.91	16.00	37.10	33.19
12		49	44100	88200	18.39		35.58		42		22	19800	39600	20.30		37.49	
13	6	47	42300	84600	18.44	15.66	35.63	32.85	43	21	22	19800	39600	20.59	16.59	37.88	33.78
14		45	40500	81000	18.43		35.53		44		21	18900	37800	20.12		37.31	
15	7	43	38700	77400	18.34	15.43	35.83	32.62	45	22	21	18900	37800	20.49	16.40	37.68	33.59
16		42	37800	75600	18.64		35.83		46		21	18900	37800	20.86		38.05	
17	8	41	36900	73800	18.89	15.77	36.08	32.96	47	23	20	18000	36000	20.22	16.16	37.41	33.35
18		39	35100	70200	18.64		35.83		48		20	18000	36000	20.57		37.76	
19	9	38	34200	68400	18.81	15.60	36.00	32.79	49	24	20	18000	36000	20.92	16.69	38.11	33.88
20		37	33300	66600	18.95		36.14		50		19	17100	34200	20.21		37.40	
21	10	36	32400	64800	19.05	15.70	36.24	32.89	51	25	19	17100	34200	20.55	16.37	37.74	33.56
22		35	31500	63000	19.12		36.31		52		19	17100	34200	20.88		38.07	
23	11	34	30600	61200	19.16	15.70	36.35	32.89	53	26	18	16200	32400	20.10	16.00	37.29	33.19
24		33	29700	59400	19.16		36.35		54		18	16200	32400	20.42		37.61	
25	12	32	28800	57600	19.12	15.60	36.31	32.79	55	27	18	16200	32400	20.74	16.47	37.93	33.66
26		31	27900	55800	19.06		36.25		56		17	15300	30600	19.88		37.07	
27	13	30	27000	54000	18.95	15.40	36.14	32.59	57	28	17	15300	30600	20.18	16.01	37.37	33.20
28		30	27000	54000	19.47		36.66		58		17	15300	30600	20.48		37.67	
29	14	29	26100	52200	19.31	15.63	36.50	32.82	59	29	17	15300	30600	20.78	16.47	37.97	33.66
30		28	25200	50400	19.13		36.32		60		17	15300	30600	21.08		38.27	
31	15	28	25200	50400	20.40	16.61	37.59	33.80	61	30	16	1 400	28800	20.13	15.93	37.32	33.12
32		27	24300	48600	20.15		37.34										

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±



ORDER INFORMATION

FPA-WZA22-xx-LF
SERIES
LEADFREE
04~30WAY
HIGH 2.25mm
UPPER CONTACT
ZIF
90°SMT

DESCRIPTION: FPC/FFC 1.0mm PITCH ZIF SMT TYPE CONNECTOR