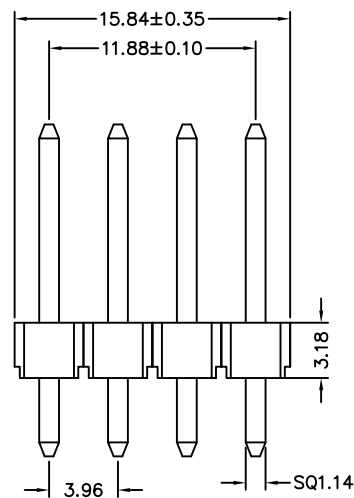
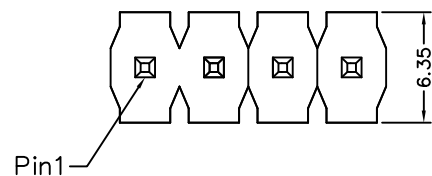


Recommended P.C.B.Layout
Tolerance:±0.03

MATERIAL

Contact Pin : Brass

Insulator: LCP UL94-V0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°



ORDER INFORMATION

H39-D31114045-1X04-LF
SERIES | | | | LEADFREE
| | | | 04 WAY
| | | | DIP 4.50mm
| | | | CONTACT 11.40mm
| | | | BASE 3.18mm
| | | | DIP 180°

DESCRIPTION: PIN HEADER 3.96mm H=3.18 W=6.35 SINGLE ROW, STRAIGHT TYPE