

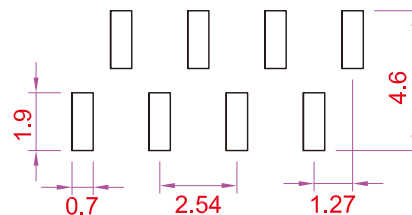


Recommended P.C. Board SMD Layout



Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 300V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0 Nylon-6T
 Contact Plated : See Option
 Standard: Full Gold Flash

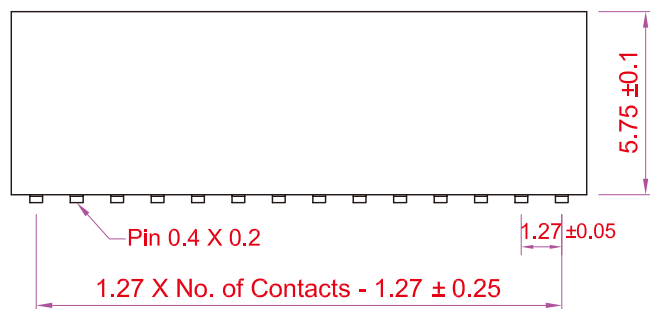

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50


.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

Y-V60X-1XxxL-LF
 SERIES | | | LEADFREE
 | | | L TYPE FOOT POSITION
 | | | 1X02:02WAY
 | | | 1X50:50WAY
 180°SMT | NON POST
 HIGH 6.0mm

DESCRIPTION: Female Header P:1.27 X 2.54mm Profile :5.75mm, Dual Row, SMD Type