
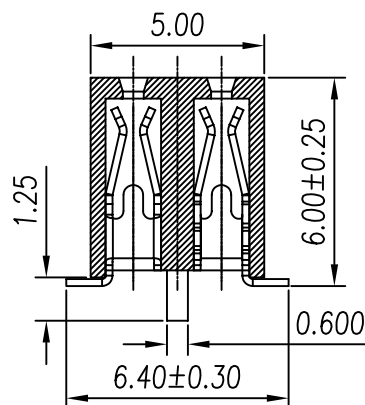
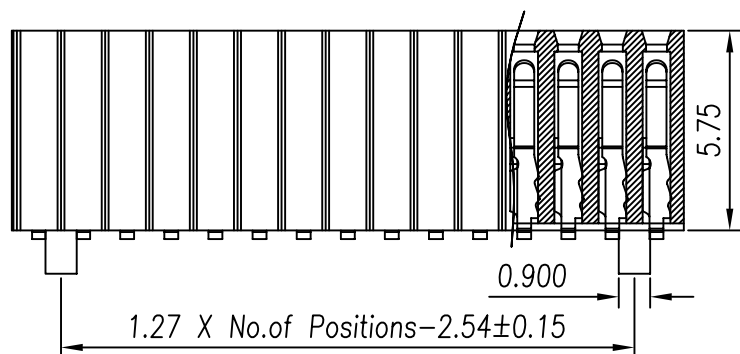


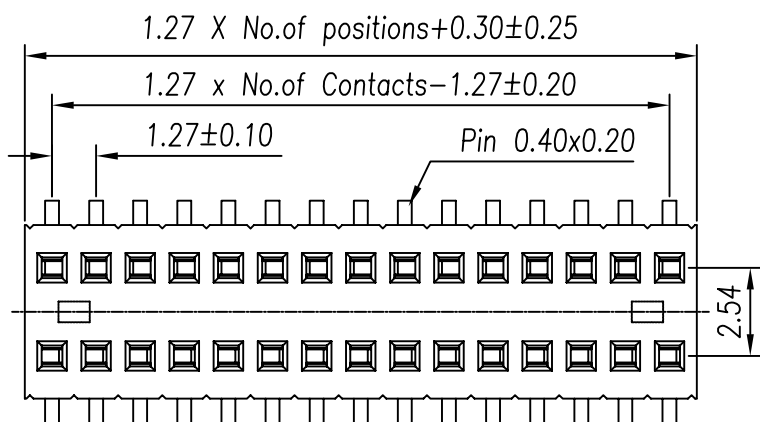

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

Nylon 6T

Recommended P.C.Board Hole Layout

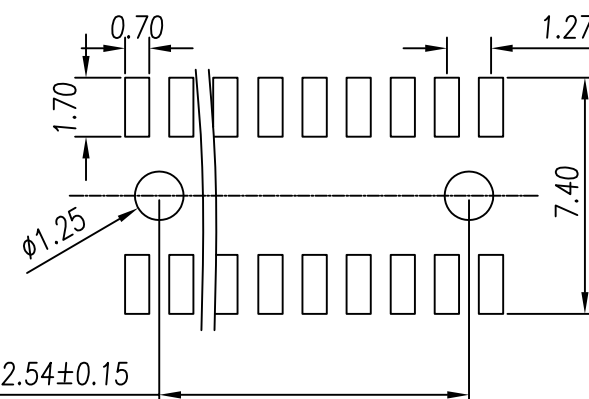

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±



ORDER INFORMATION

Y-V60P-2Xxx-LF
SERIES 180°SMT POST HIGH 6.0mm
LEADFREE
2X03:06WAY
2X50:100WAY

DESCRIPTION: 1.27 FEMALE HEADER DUAL ROWS SMT TYPE H:6.0