


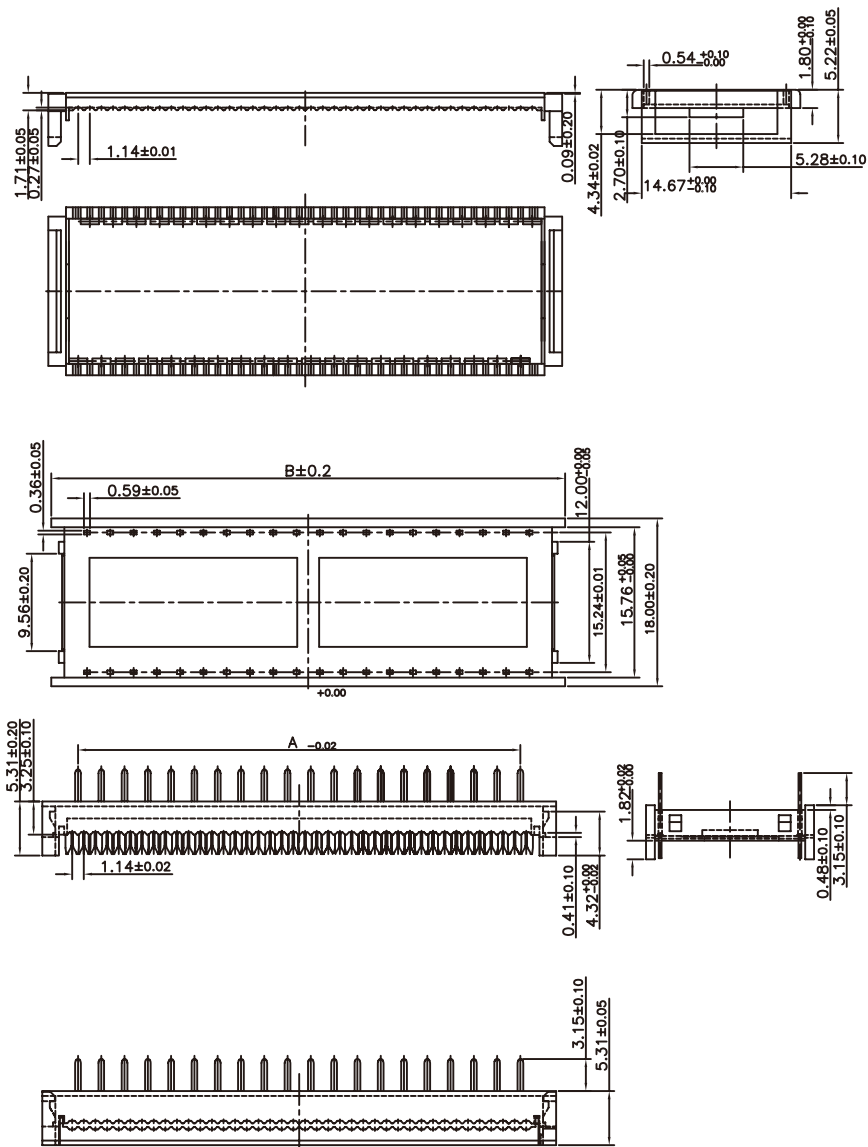

▽ DIP3 PITCH 2.54MMX15.24MM I.D.C. DIP PLUG
FOR PITCH 1.27MM CENTER FLAT RIBBON CABLE

MATERIAL & FINISH

*INSULATOR: PBT+GLASS FIBER UL 94V-0

*CONTACT: BRASS

*FINISH: GOLD-PLATED OVER NICKEL
SPECIFICATIONS

*CURRENT RATING: 1A AC,DC

*VOLTAGE RATING: 250V AC,DC

*TEMPERATURE RANGE: -40°C TO $+105^{\circ}\text{C}$

*CONTACT RESISTANCE: $20\text{M}\Omega$ MAX

*INSULATION RESISTANCE: $1,000\text{M}\Omega$ MIN

*WITHSTANDING VOLTAGE: 500V AC/MIN

PART NO	DIM A	DIM B
IP06-C2-10	10.16	17.96
IP06-C2-14	15.24	23.04
IP06-C2-16	17.78	25.58
IP06-C2-18	20.32	28.12
IP06-C2-20	22.86	30.66
IP06-C2-24	27.94	35.74

PART NO	DIM A	DIM B
IP06-C2-26	30.48	38.28
IP06-C2-28	33.02	40.82
IP06-C2-32	38.10	46.00
IP06-C2-34	40.64	48.44
IP06-C2-36	43.18	50.98
IP06-C2-40	48.26	56.06

DIMENSIONS:MM

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

IP06-C2-xx-LF
SERIES | LEADFREE
10~40WAY
TWO TYPE

DESCRIPTION: IDC DIP PLUG PITCH2.54mm*7.62mm