
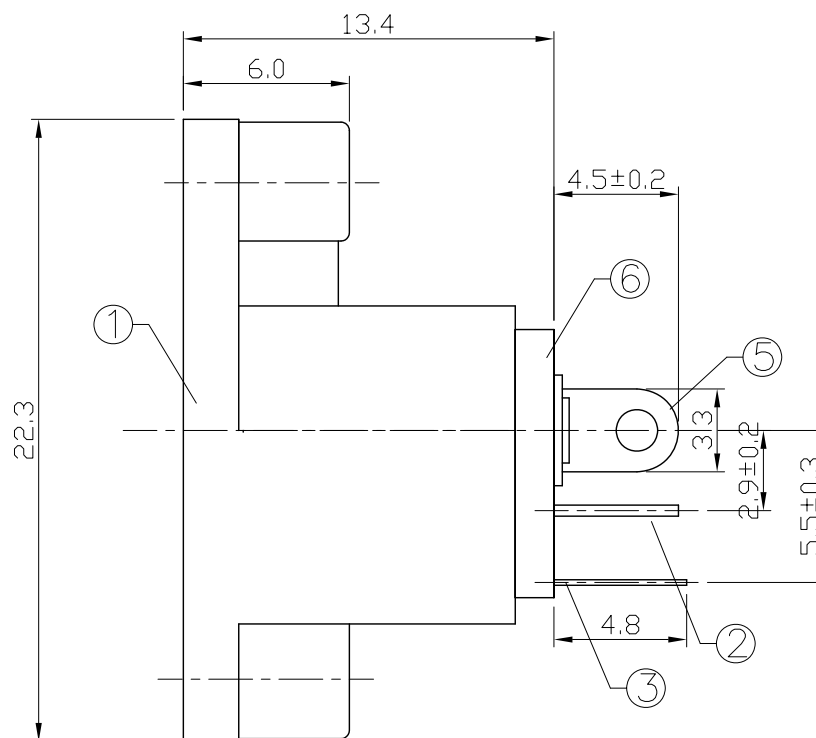


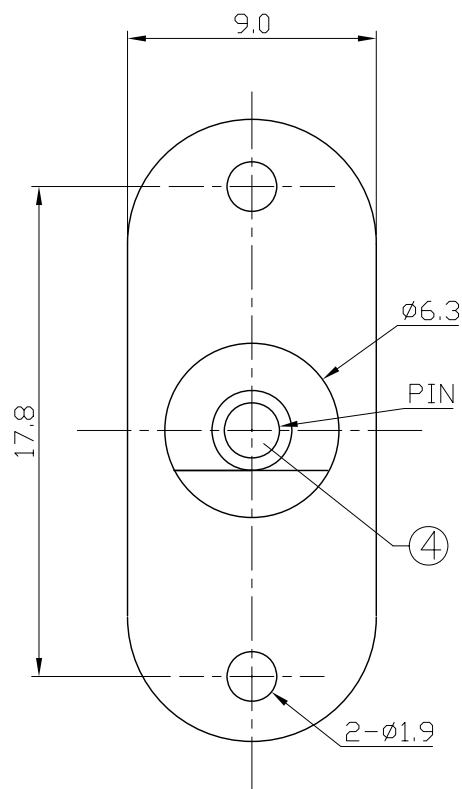

CAT. NO.	PIN	SCHEMATIC
DCJ-SPE13-20	Ø2.0	1
DCJ-SPE13-25	Ø2.5	3
		2

6	COVER	1	PBT 4815	UL-94V0(BLACK)
5	AXIS SUPPORT	1	C2680	MB:Cu Sn PLATED
4	PIN	1	C2680	MB:Cu Ni PLATED
3	SPRING	1	C5191	MB:Cu Sn PLATED
2	FLAT PIECE	1	C2680	MB:Cu Sn PLATED
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

DCJ-SPE13-xx-LF
SERIES
SOLDER
LEADFREE
20:2.00
25:2.50
HIGH 13.4mm
EAR
PANEL

DESCRIPTION: DC POWER JACK