
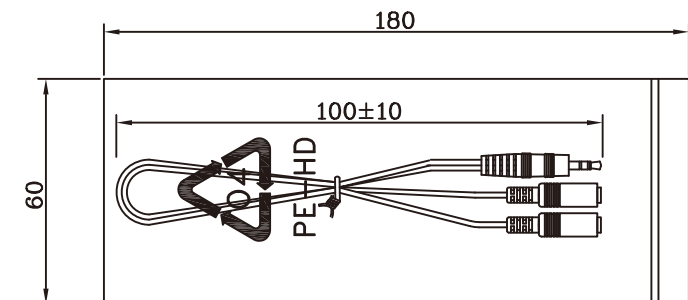


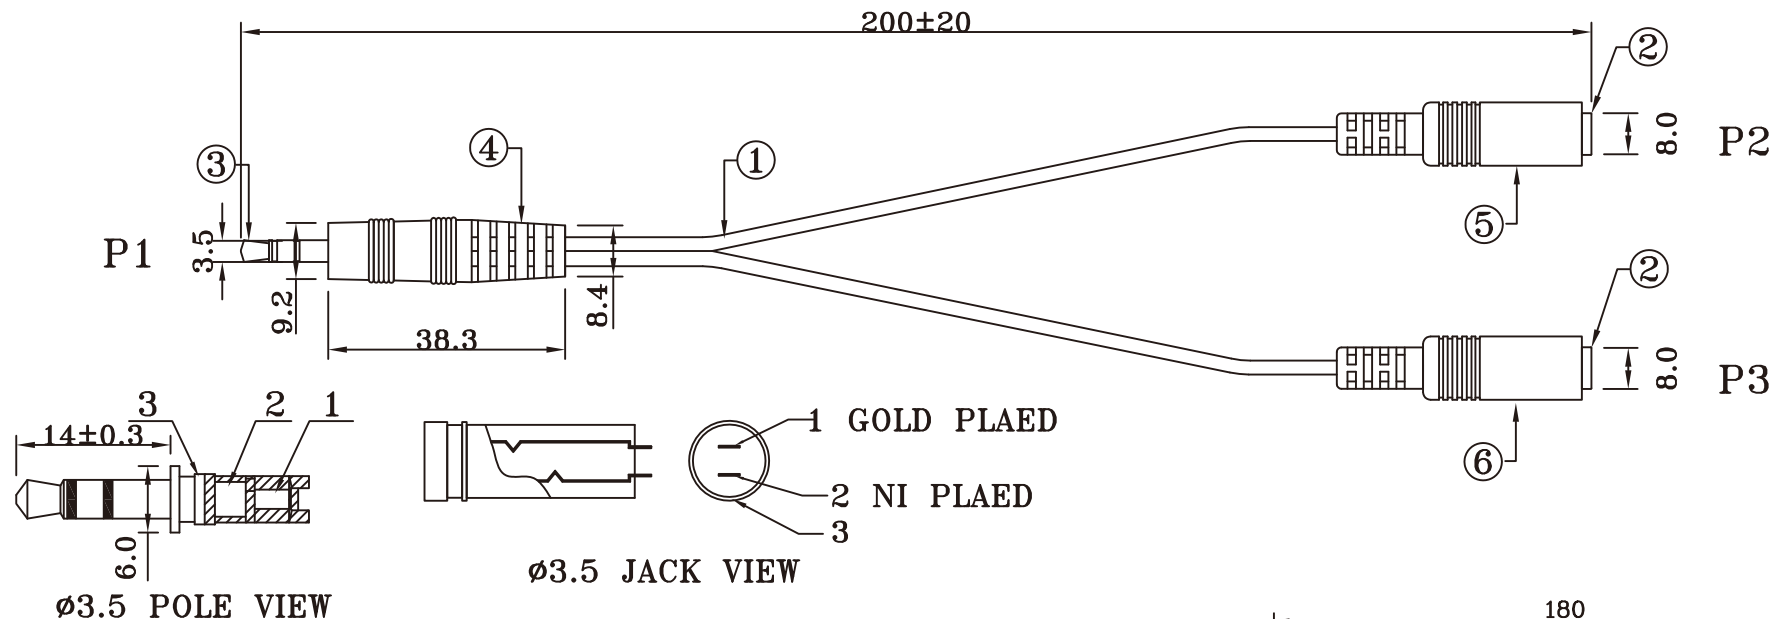

WIRE ARRANGEMENT			
P1	COLOR	P2	P3
1	WHITE		2
2	RED	1	
3	BRAID SHIELD	3	3

6.	PLASTIC HOOD COLOR LIGHT GREEN PVC 45P.
5.	PLASTIC HOOD COLOR PINK PVC 45P.
4.	PLASTIC HOOD COLOR BLACK PVC 45P.
3.	STEREO JACK:ø3.5mm, THREE POLE, INSULATOR:BLACK.
2.	STEREO PLUG:ø3.5x26.5mm, THREE POLE, INSULATOR:BLACK.
1.	CABLE: UL2547 28AWGx2C+S,PVC JACKET BLACK.OD=2.8mm.
NO.	NOTES:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG±



ORDER INFORMATION

PNX12-030328-E20C-LF

SERIES
LEADFREE
200mm
MALE TO FEMALE
28AWG
03 PIN TO 03 PIN

DESCRIPTION: