


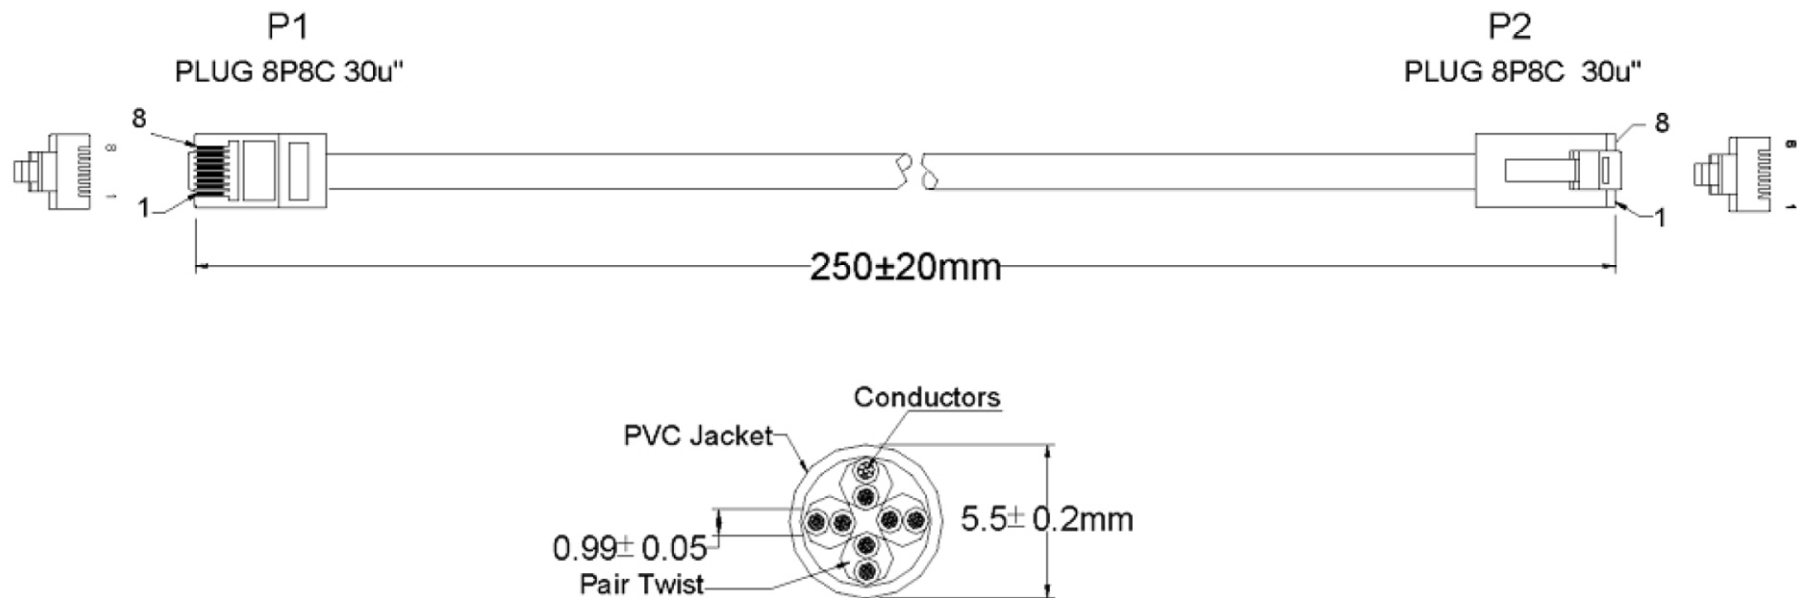

SPECIFICATION:

1.COMPONENT:

- A.Size of conductors :CAT.5e 24AWG (0.20*7) Copper Stranded Cable.
 B.Color coded insulation :(P.P)Green,White/Green ;Brown,White/Brown;
 Blue;White/Blue;Orange,White/Orange.
 C.Diameter of electric :0.99±0.05mm.
 D.UL style no.of single :(30v, 75°c).
 E.Number of twist pairs :Four pairs.

2.JACKET MATERIAL.

- A.Overall diameter :Ave 5.5mm
 B.Color. : BLACK.

3.PLUG TYPE.

MATERIAL: :PC UL 94V-2

WIRING: 568B

P1	COLOR	P2
1	White/Orange	1
2	Orange	2
3	White/Green	3
6	Green	6
4	Blue	4
5	White/ Blue	5
7	White/Brown	7
8	BROWN	8

NOTE: ∞ TWISTED PAIR

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

RJX2-080824C5E-M25C-LF

SERIES

LEADFREE

250mm

CAT.5e

24 AWG

08 TO 08 WAY

MALE TO MALE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: