

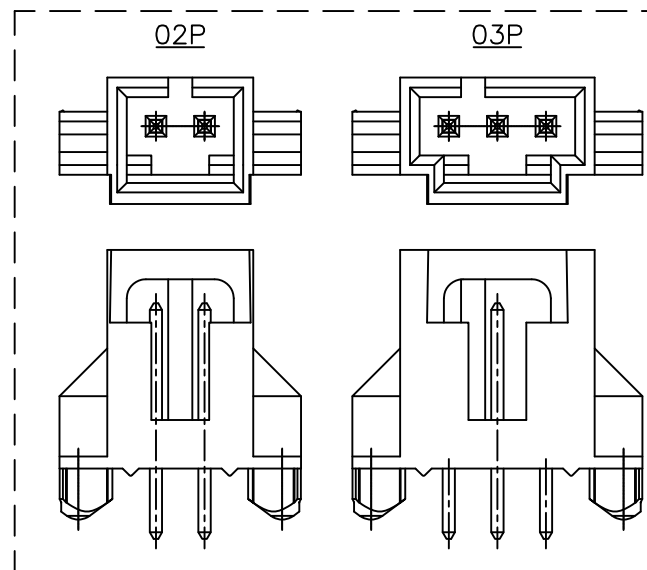


SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold-flash
Material: PBT,UL94V-0
Color: Black

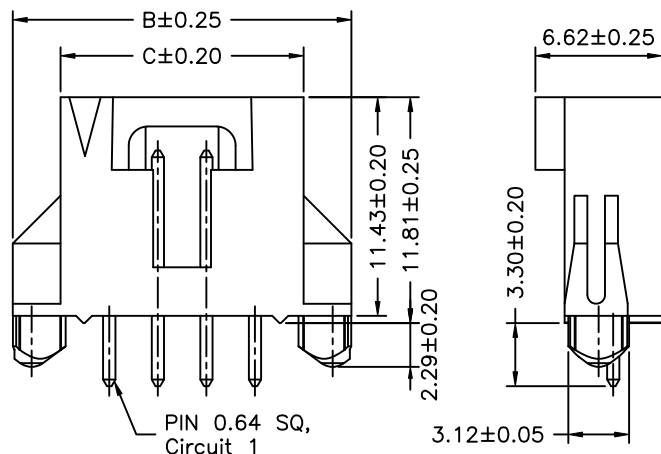

Circuit NO.	Dimensions		
	A	B	C
02P	2.54	12.63	7.63
03P	5.08	15.17	10.17
04P	7.62	17.71	12.71
05P	10.16	20.25	15.25
06P	12.70	22.79	17.79
07P	15.24	25.33	20.33
08P	17.78	27.87	22.87
09P	20.32	30.41	25.41
10P	22.86	32.95	27.95
11P	25.40	35.49	30.49
12P	27.94	38.03	33.03

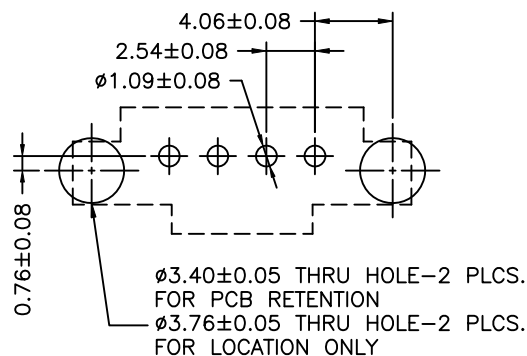

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±



ORDER INFORMATION

MCG-DP2-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY

1X12:12WAY

POST
DIP 180°

DESCRIPTION: 2.54mm PITCH 180°WAFER