
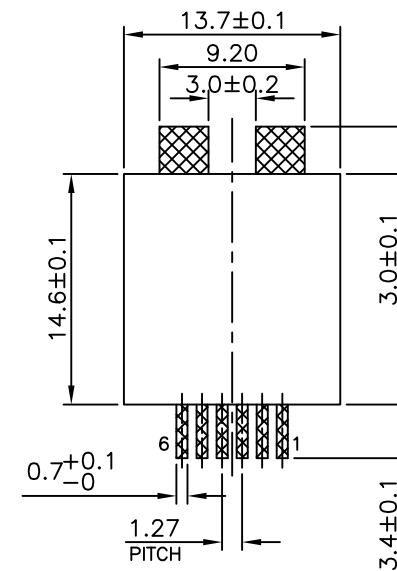
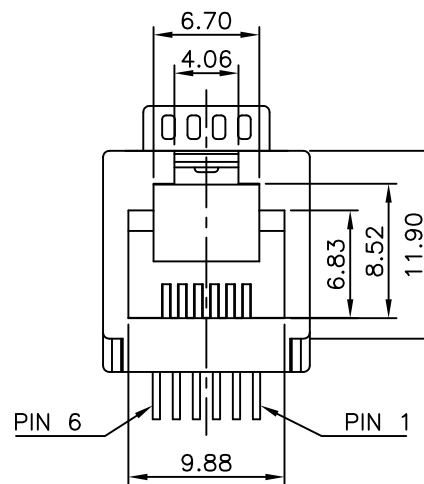
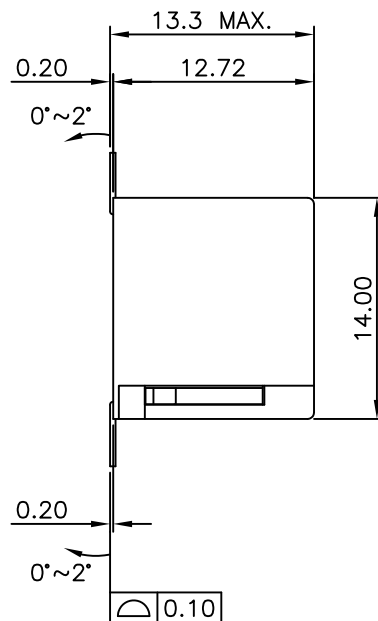


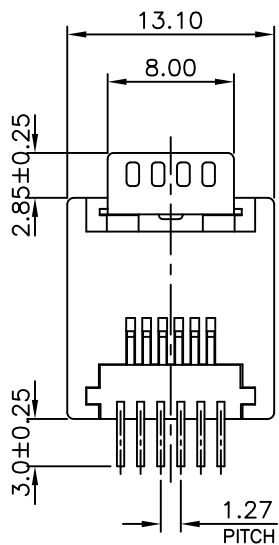

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: $\pm 0.05\text{mm}$ (TOP VIEW)

NOTE:
CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:

- 1.1 HOUSING: PA9T, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.2 INSERT HOUSING: PA9T, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.3 CONTACTS: PHOSPHOR BRONZE.
- 1.4 HOLD DOWN: BRASS.
- 1.5 MYLAR: SILICONE POLYMER.

2. FINISH:

- 2.1 CONTACTS: $0.152\mu\text{m}$ [$6\mu''$] GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL UNDERPLATED OVERALL.
- 2.2 HOLD DOWN: $1.27\mu\text{m}$ [$50\mu''$] MIN. MATTE TIN PLATED.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, $\pm$
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG $\pm$




ORDER INFORMATION

MJV13-KX06R-0606-LF

SERIES REEL 6P6C LEADFREE
06u" GOLD
NON EAR
BLACK


DESCRIPTION: 6POSITION TOP ENTRY SMT TYPE
W/O BOARD LOCK PCB JACK

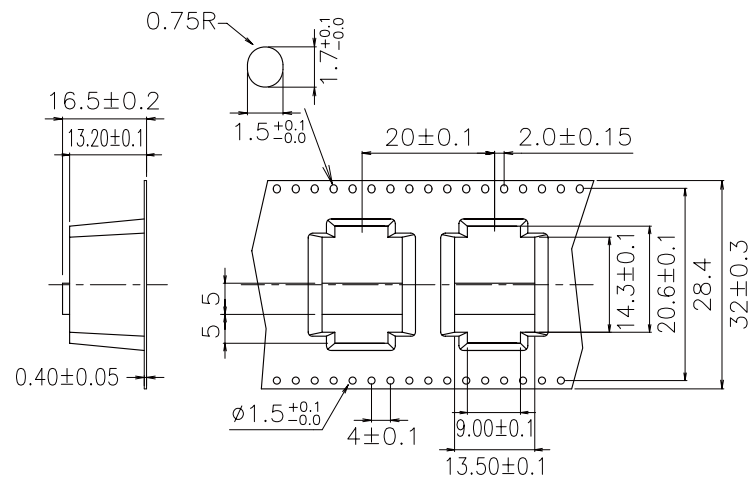

MATERIALS:

- REEL-2mm THICK PLASTIC WHEEL
- CARRIER-PS (0.40mm THICK TAPE).

△ COVER TAPE -PE (MIN0.045~0.12mm THICK TAPE).

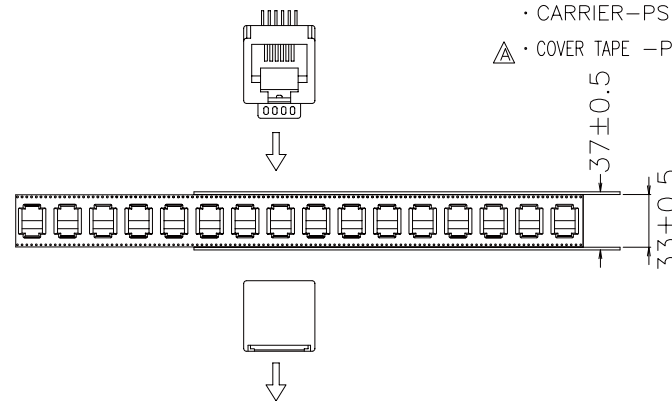


外箱料號 361-052(X1) NO MARK
 外箱料號 361-173(X1)
 支撐架料號 361-058(X4)
 軸外保護帶料號 361-318

COVER TAPE
 料號 : 361-059

CARRIER
 料號 : 361-050

REEL

料號 : 361-047

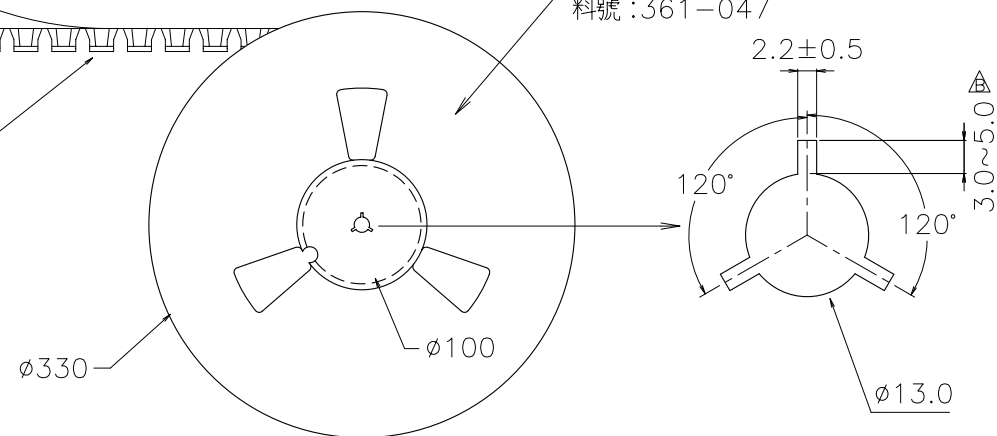

NOTES:

- THE DIRECTION OF JACKS PUT INTO CARRIER.
- 10 EMPTY CAVITIES FOR BOTH OF TOP AND BOTTOM OF THE CARRIER.
- 180 PCS PRODUCTS BE PACKAGED ONE REEL.
- CARTON SIZE: 345(L)X345(W)X315(H)
 8 REEL/CARTON
 TOTAL: 1440 PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.25
 .XX ± 0.13
 .XXX ± 0.05
 ANG ±



ORDER INFORMATION

MJV13-KX06R-0606-LF

SERIES

REEL

6P6C

LEADFREE

06u" GOLD

NON EAR

BLACK

DESCRIPTION: 6POSITION TOP ENTRY SMT TYPE
 W/O BOARD LOCK PCB JACK