





NOTE:
CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:

- 1.1 HOUSING: PA9T, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.2 INSERT HOUSING: PA9T, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.3 CONTACTS: PHOSPHOR BRONZE.
- 1.4 HOLD DOWN: BRASS.
- 1.5 MYLAR: SILICONE POLYMER.

2. FINISH:

- 2.1 CONTACTS: $0.152\mu\text{m}$ [$6\mu''$] GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL UNDERPLATED OVERALL.
- 2.2 HOLD DOWN: $1.27\mu\text{m}$ [$50\mu''$] MIN. MATTE TIN PLATED.

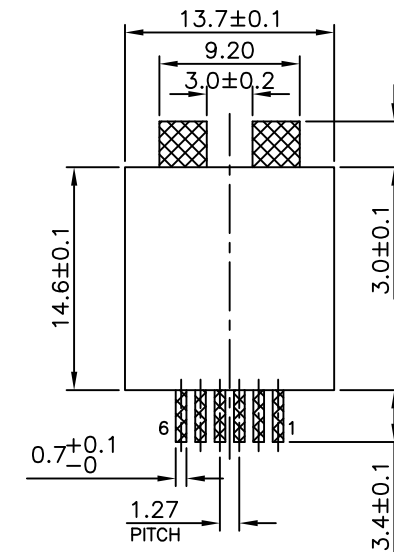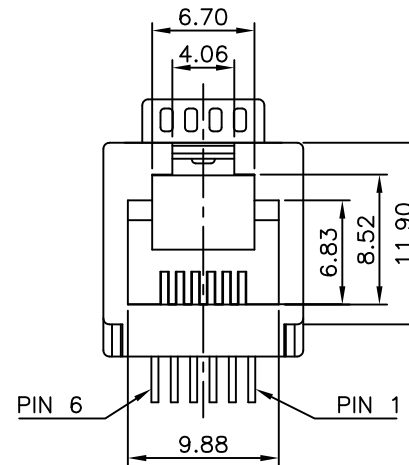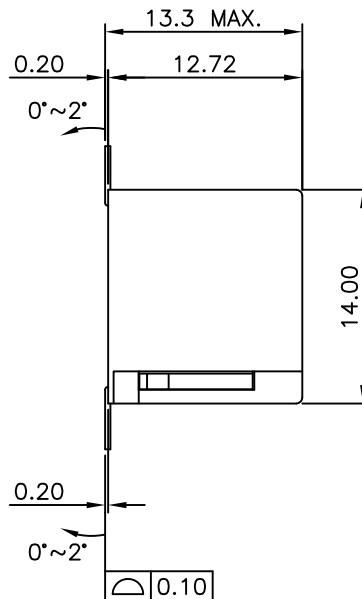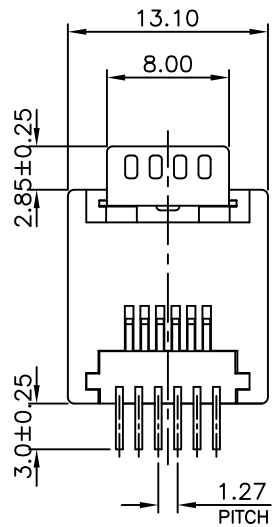

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05mm (TOP VIEW)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±



ORDER INFORMATION

MJV13-KX06-0606-LF

SERIES 6P6C LEADFREE
06u" GOLD
NON EAR
BLACK

DESCRIPTION: 6POSITION, SMT TYPE, TOP ENTRY PCB JACK