



SPECIFICATIONS



Circuit:2~10
 Voltage rating:125V AC,DC
 Withstanding voltage:500V AC/minute
 Insulation resistance:1000M ΩHM min
 Temperature range:-25°C~+85°C
 Material:UL94V-0 nylon 66





PR-S-02





PR-S-03




PR-S-04





PR-S-05






PR-S-06




PR-S-07





PR-S-08

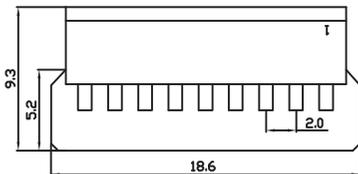

PR-S-09



PR-S-10

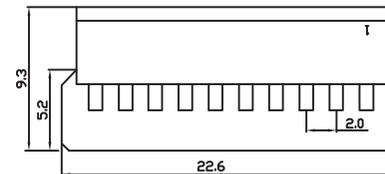

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/mm SCALE 1:1
 DATE

SIZE A4


PJECTION

TOLERANCES ARE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

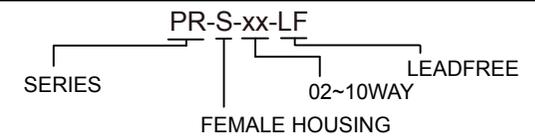

DESCRIPTION: