




L COVER



C COVER

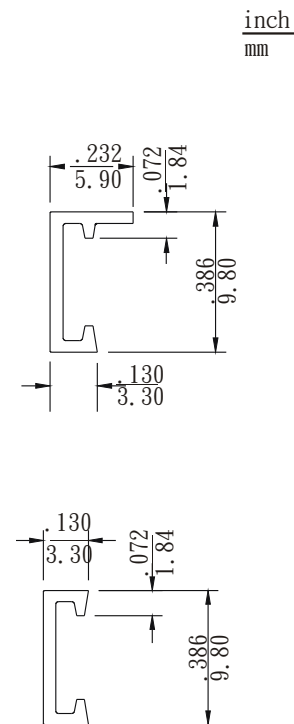

### Female Connector

- \* Material : Nylon UL 94V-2
- \* Contact : Tin-plated phosphor bronze
- \* Current rating : 4.5A, AC/DC
- \* Voltage rating : 250V, AC/DC
- \* Insulation O. D. : .095" (2.41mm) max.
- \* Applicable wire AWG#22- #18
- \* 4 circuits

### Series Covers

- \* Color : natural

inch  
mm

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



### ORDER INFORMATION

DP-STx-04-LF  
SERIES | | | LEADFREE  
| | | 04WAY  
FEMALE | L:L COVER  
| C:C COVER  
| IDT

DESCRIPTION: Disk Drive Power Connection System