

Material & Finish

SHELL:

ABS BLACK

INSULATOR

PBT UL 94V-0, BLACK

PIN CONTACT:

PHOSPHOR BRONZE,
GOLD FLASH

CURRENT RATING:

5 Amp

DIELECTRIC STRENGTH:


1000V for one minute

INSULATOR RESISTANCE:

1000M Ω Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C

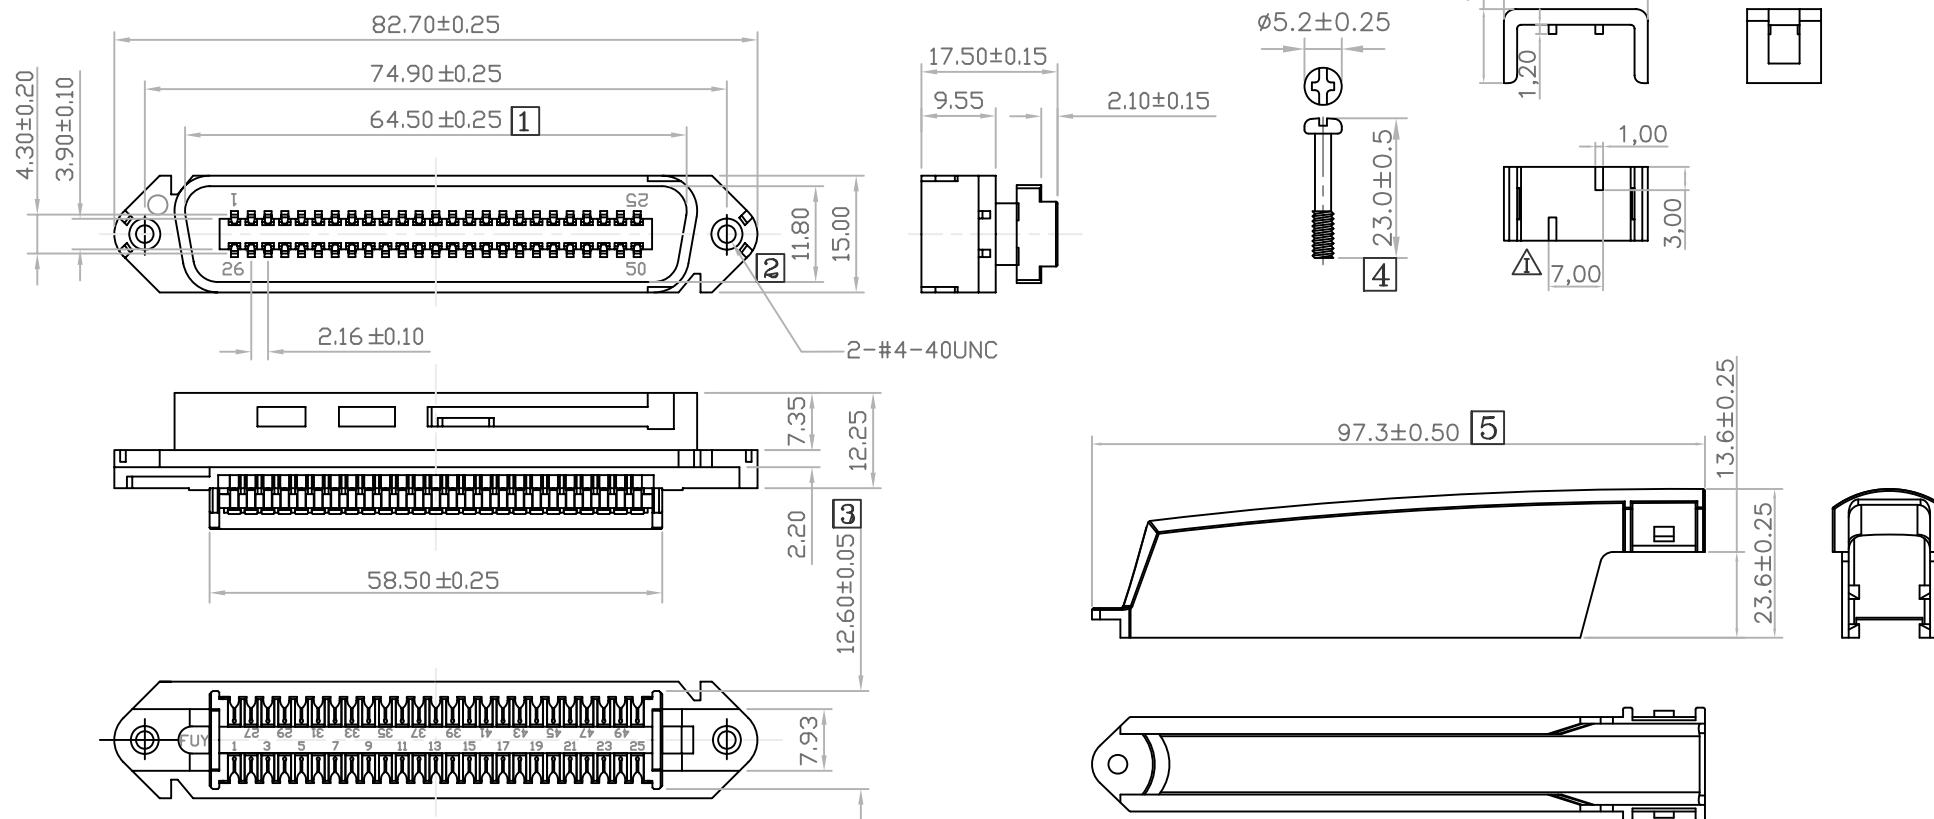

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X. ± 0.30

UNIT / mm

SCALE 1:1

.XX. ± 0.20


DATE

.XXX. $\pm$

ANG $\pm 3^\circ$

SIZE A4

PPOJECTION



ORDER INFORMATION

CTL-PK-50-LF
SERIES T T LEADFREE
50 WAY
BLACK
MALE

DESCRIPTION: CENTRONIC I. D. C. TYPE MALE 50PIN RIGHT ANGLE COVER ALL PLASTIC

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com